

COREScript Construct Reference Guide

Copyright © 1998-2015 Vitech Corporation. All rights reserved.


No part of this document may be reproduced in any form, including, but not limited to, photocopying, translating into another language, or storage in a data retrieval system, without prior written consent of Vitech Corporation.

Restricted Rights Legend

Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c) (1) (ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7013.

Vitech Corporation

2270 Kraft Drive, Suite 1600
Blacksburg, Virginia 24060
540.951.3322 FAX: 540.951.8222
Customer Support: support@vitechcorp.com
www.vitechcorp.com

 **CORE™** is a trademark of Vitech Corporation and refers to all products in the CORE software product family.

Other product names mentioned herein are used for identification purposes only, and may be trademarks of their respective companies.

Publication Date: June 2015

TABLE OF CONTENTS

Control Constructs	1
Block Construct	1
Disabled Code Construct	2
Hierarchy Iterate Construct	3
If Then Construct	5
If Then Else Construct	6
Include Script	7
Iterate Construct	8
Repeat Until Construct	9
Return	10
Update Block Construct	11
While Do Construct	12
Database Query Constructs	13
Children Query	13
Diagnostic Results Query	14
Element Attribute Query	15
Element Defined Parameters Query	16
Element Parameter Units Query	17
Element Parameter Value Query	18
Elements Query	19
Named Element Query	20
Parents Query	21
Relationship Attribute Query	22
Relationships Query	23
Root Folder Query	24
Targets Query	25
Database Update Constructs	27
Add Element To Folder	27
Delete Object	28
Lock Object	29
Move Element To Folder	30
New Element	31
New Folder	32
New Relationship	33
Purge Attribute Versions	34
Remove Element From Folder	35
Rename Element	36
Rename Folder	37
Renumber Elements	38
Set Element Attribute	39
Set Element Diagnostic Results	40
Set Element Parameter Units	41
Set Element Parameter Value	42
Set Relationship Attribute	43
Unlock Object	44
File Management Constructs	45
Close File	45
Open File Dialog	46
Open Input File	47
Open Output File	48
Open Temporary Output File	49
Save File Dialog	50
Set Default Input File	51
Set Default Output File	52

COREscript Constructs

Output Constructs	53
Comma-Delimited Output	53
Diagram File Output	54
Diagram Output	57
Element Output	60
Include External Boilerplate	63
Include External Graphic	64
Include Style Sheet	65
RDT Output	66
Set Style	67
Table Output	68
Tag Output	70
Text Output	71
Variable Output	72
Parsing Constructs	73
At End	73
Get Position	74
Next	75
Peek	76
Set Position	77
Size	78
Skip	79
Up To	80
Project Query Constructs	81
Project Property	81
Project Query	83
Project Registry Query	84
Projects	85
Remove Project Registry Key	86
Set Project	87
Set Project Registry Value	88
Prompting Constructs	89
Composite Prompt	89
Drop-Down Selection Prompt	90
Element Selection Prompt	91
Message Prompt	93
Multiple Selection Prompt	94
Project Explorer Prompt	96
Prompt Separator	97
Report Settings Prompt	98
Single Selection Prompt	99
Value Prompt	100
YesOrNo Prompt	101
Schema Query Constructs	103
Attribute Definition Property	103
Class Attributes	104
Class Parameters	105
Class Property	106
Class Query	107
Class Relations	108
Class Target Classes	109
Database Classes	110
Facilities	111
Facility Database Classes	112
Facility Property	113
Facility Query	114

COREscript Constructs

Facility Schema Classes	115
Parameter Definition Property	116
Relation Attributes	117
Relation Property	118
Relation Query	119
Relations	120
Schema Classes	121
Simulation Constructs	123
Resource Level Query	123
Script Context Query	124
Simulator Property Query	125
Utilities Constructs	127
Available Diagrams Query	127
Beep	128
Breakpoint	129
Cancel Report	130
Change Indicator	131
Color Query	132
Comment	133
Expire Output	134
Open Transcript	135
Send Mail Message	136
System Property Query	138
Variable Manipulation Constructs	141
Database Object Sort	141
Element Sort	143
Element Sort Blocks	144
Filter	145
Random Number	147
Report Section	148
Report Setting	149
Sort	150
Table Definitions	151
Variable Assignment	152
Construct Index	155



CUSTOMER RESOURCE OPTIONS

Supporting users throughout their entire journey of learning MBSE is central to Vitech's mission. For users looking for additional resources outside of this document, please refer to the links below. Alternatively, all links may be found at www.vitechcorp.com/resources.



[Webinars](#)

Webinar archive with over 40 hours of premium industry and tool-specific content.



[Screencasts](#)

Short videos to guide users through installation and usage of Vitech software.



[A Primer for Model-Based Systems Engineering](#)

Our free eBook and our most popular resource for new and experienced practitioners alike.



[Help Files](#)

Searchable online access to Vitech software help files.



[Technical Papers](#)

Library of technical and white papers for download, authored by Vitech systems engineers.



[MySupport](#)


Knowledge Base, Exclusive Webinars and Screencasts, Chat Support, Documents, Download Archive, etc.

Our team has also created resources libraries customized for your experience level:

All Resources	Advanced
Beginner	IT / Sys Admin
Intermediate	Student

CONTROL CONSTRUCTS

Block Construct

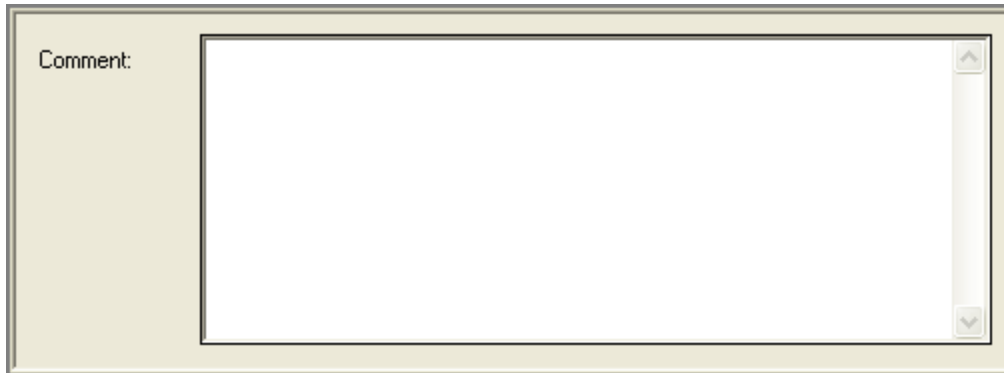

Description


This construct consists of two parts on different lines of the Report Editor's Script pane that may enclose other constructs indented between them. A block is simply an artificial, non-functional construct for the purpose of promoting code decomposability, composability, reusability, and documentation. It encloses code that can then be copied and moved as a unit, and it breaks up the flow of the script into more manageable units.

Comment

An explanation of what is accomplished by the constructs enclosed within the block, block assumptions, etc.

COREscript Constructs Control

Disabled Code Construct

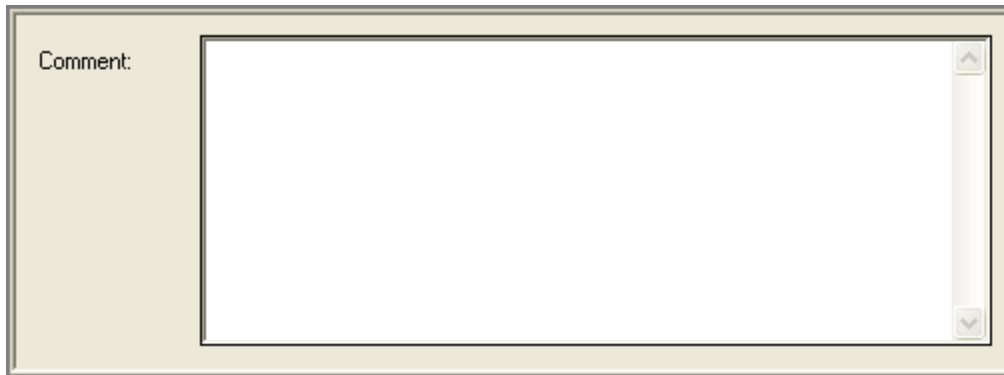The image shows a graphical user interface for a 'Disabled Code Construct'. It consists of a light beige rectangular container. On the left side of this container, the word 'Comment:' is displayed. To the right of the label is a large, empty white rectangular area, which serves as a text input field. This input field has a thin black border and a vertical scrollbar on its right edge, indicating it can hold multiple lines of text.

Description

This construct consists of two parts on different lines of the Report Editor's Script pane that may enclose other constructs indented between them. The enclosed constructs are not executed.

Comment

An explanation of why the enclosed constructs have been disabled.

COREscript Constructs Control

Hierarchy Iterate Construct

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Relations:	<input type="text" value="nil"/>	<div><div></div><div>↑</div><div>↓</div></div>
		<div>Add Remove</div>
Target Classes:	<input type="text" value="nil"/>	<div><div></div><div>↑</div><div>↓</div></div>
		<div>Add Remove</div>
Sort Block:	<input type="text" value="nil"/>	<input type="text" value="Numeric by class"/>
Maximum Levels:	<input type="text" value="nil"/>	<input type="text"/>
Iteration Variable:		<input type="text"/>
Counter Variable:		<input type="text"/>
Level Variable:		<input type="text"/>
Relation Variable:		<input type="text"/>

Description

Given a starting point (the root) and a collection of valid relations and target classes, the Hierarchy Iterate Construct generates a tree of elements and iterates across the tree. The tree is expanded depth first (left to right) and uses a pre-ordered traversal. This construct is recursion-safe – the second time an element is encountered, it is reported but its child nodes are not traversed.

Object

An element specifying the root for the tree. This is the starting point from which the hierarchy will be built based upon the specified relations and target classes.

Relations

The collection of valid relations to use when building the hierarchy for iteration. This is equivalent to the set of relations you would specify if building a custom hierarchy view.

Target Classes

The collection of valid target classes to use when building the hierarchy for iteration. Only those targets within the classes specified will appear in the hierarchy. For example, if you wished to iterate through a Requirement hierarchy and all Functions that are specified by the Requirement hierarchy, specifying Requirement and Function as the valid target classes would prevent any other classes (e.g., Components) from appearing within the iteration.

Sort Block

Sort block definition of the sort block to be used to order the children of a node within the hierarchy. Child nodes are ordered first by relation and then by the criteria in the specified sort block.

Maximum Levels

An integer specifying the maximum depth of the tree. Nodes will be expanded until either the leaf-level nodes have no children (as defined by the set of valid relations and target classes) or the leaf nodes are at the maximum depth. The root of the tree is defined as level 1.

COREscript Constructs Control

Iteration Variable

The variable which will hold the current element during the iteration.

Counter Variable

The variable, which will hold the total number of elements, iterated over so far.

Level Variable


The variable which will hold the level of the current element within the hierarchy (where the root of the tree is defined as level 1).

Relation Variable

The variable, which will hold the relation, used to reach the current element (the relation from the parent node to the child node).

COREscript Constructs Control

If Then Construct

The image shows a software dialog box titled 'If Then Construct'. On the left side, there is a label 'Expression:'. To the right of this label is a large, empty rectangular text area with a vertical scrollbar on its right edge. At the bottom left of the dialog box, there is a button labeled 'Validate'.

Description

This construct consists of two parts on different lines of the Report Editor's Script pane that may enclose other constructs indented between them. The enclosed constructs are executed if and only if *expression* evaluates to *true*.

Expression

An expression consisting of operators in the CORE expression language, variables defined using the Edit Variables command under the Properties menu of the Report Editor, and constants that can be coded in some data types. The result of this expression must be a Boolean.

Validate

Validates the syntax of the *expression* to ensure that neither operators nor operands appear in unexpected locations, all operators are recognized, and all variables have been defined. No type or bounds checking can be performed.

COREscript Constructs Control

If Then Else Construct

The image shows a dialog box for the 'If Then Else Construct'. It has a light beige background. On the left side, there is a label 'Expression:' followed by a large, empty rectangular text area. Below the text area, there is a button labeled 'Validate'. The text area has a vertical scrollbar on its right side.

Description

This construct consists of three parts on different lines of the Report Editor's Script pane that may enclose two groups of other constructs indented between them. This construct implements branch logic. The first enclosed group of constructs (the *then* branch) is executed if *expression* evaluates to *true*. The second enclosed group of constructs (the *else* branch) is executed if *expression* evaluates to *false*.

Expression

An expression consisting of operators in the CORE expression language, variables defined using the Edit Variables command under the Properties menu of the Report Editor, and constants that can be coded in some data types. The result of this expression must be a Boolean.

Validate

Validates the syntax of the *expression* to ensure that neither operators nor operands appear in unexpected locations, all operators are recognized, and all variables have been defined. No type or bounds checking can be performed.

COREscript Constructs Control

Include Script

The dialog box is titled "Include Script". It contains the following elements:

- Script:** A dropdown menu currently showing "nil". To its right is a "Script Browse" button (represented by a folder icon).
- Location:** Four radio buttons for selecting the directory:
 - ☐ Main Report Directory
 - ☐ Common Report Directory
 - ☒ User Report Directory
 - ☐ Relative to Calling Script
- Script Arguments:** A dropdown menu and an "Add" button. Below these is a large text area for entering script arguments. To the right of the text area are a "Remove" button and two arrow buttons (left and right).
- Return:** A dropdown menu currently showing "nil".

Description

Transfers control to the specified script file, which is executed in its entirety before control returns to the next construct in the current script (much like a subroutine or procedure call). The invoked script and any scripts it includes have access to global variables declared in the current report execution. Any duplicate variable declarations in the included script reference variables already defined in the current report execution. Note that double-clicking the left mouse button with the pointer over an Include Script construct in the Script pane of a Report Editor opens a new Report Editor containing the script file included by the construct, if any.

Script

The name of the script file to be executed. Can be specified either by selecting a variable from the drop-down on the left, manually entering as a parameter, or selecting the file using a standard Windows file dialog (via the Script Browse Button). If a manually entered file name does not currently exist the parameter field background will change to yellow.

Script Browse Button

The Script browse button opens a standard Windows file dialog. The user must specify a script file in the *location* directory as described below or in a subdirectory thereof. Canceling the dialog leaves the previous selection unchanged.

Location

The CORE directory where the script is located. When set to main, common, or user, the construct uses the settings established in the Report Directories portion of the CORE user preferences to locate the included script file in the appropriate directory.

Script Arguments

The ordered collection of variables whose values will be passed to the invoked script as arguments. If the number of variables does not match exactly with the number of parameters declared in the script properties portion of the invoked script, an error will result. Any values assigned to the parameters from within the invoked script will not affect the corresponding arguments in the current script.

Return

Variable to hold the result, if any, from executing the include script. In order for an include script to return a value, it must complete with a Return construct that has an argument.

COREscript Constructs Control

Iterate Construct

	Arguments	Parameters
Collection:	<input type="text" value="nil"/>	
Iteration Variable:		<input type="text"/>
Counter Variable:		<input type="text"/>

Description

This construct consists of two parts on different lines of the Report Editor's Script pane that may enclose other constructs indented between them. The enclosed constructs are executed once for each object in the *collection*.

On each iteration, a different object in the *collection* is assigned to the *iteration variable* if one is defined. If the *collection* is an array or ordered collection, this construct iterates over the objects in their ordered defined by the *collection*. If the *collection* is a string or symbol, this construct iterates over its characters in order.

On the first iteration, the *counter variable* is assigned the value 1. On every subsequent iteration, its value is incremented by 1.

Collection

Name of a variable containing the collection over which to iterate, which can be of one of the following data types:

- Array
- Bag
- Dictionary
- Ordered Collection
- Set
- String
- Symbol

If the collection is a dictionary, this construct iterates over the values stored in the dictionary, not the keys whereby the values are accessed.

Iteration Variable


Name of the iteration variable. This variable is declared within the scope of this construct but will not be accessible after this construct terminates.

Counter Variable

Name of the counter variable. This variable is declared within the scope of this construct but will not be accessible after this construct terminates.

COREscript Constructs Control

Repeat Until Construct

A dialog box for the 'Repeat Until Construct'. It has a light beige background and a thin grey border. On the left side, there is a label 'Expression:' in a small font. Below this label is a small button labeled 'Validate'. To the right of the label is a large, empty rectangular text area with a vertical scrollbar on its right edge. The text area is currently empty.

Description

This construct consists of two parts on different lines of the Report Editor's Script pane that may enclose other constructs indented between them. This construct implements loop logic. After each time the group of enclosed constructs is executed, the *expression* is tested and, if it does not evaluate to *true*, control flows back to the beginning. Note that the enclosed constructs are guaranteed to be executed at least once, since the test is performed at the end.

Expression

An expression consisting of operators in the CORE expression language, variables defined using the Edit Variables command under the Properties menu of the Report Editor, and constants that can be coded in some data types. The result of this expression must be a Boolean.

Validate

Validates the syntax of the *expression* to ensure that neither operators nor operands appear in unexpected locations, all operators are recognized, and all variables have been defined. No type or bounds checking can be performed.

COREscript Constructs Control

Return

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	

Description

Terminates execution of an include script returning control to the calling script. If the Return Construct is encountered in the top-level script, the report is exited.

Object

Variable that contains the object to be returned from the script.

COREscript Constructs Control

Update Block Construct

	Arguments	Parameters
Comment:	<div></div>	
Error Message:	<div>nil</div>	

Description

This construct consists of three parts on different lines of the Report Editor's Script pane that may enclose two groups of other constructs indented between them. This construct wraps database updates with an error handler to process errors encountered due to invalid update attempts. The first enclosed group is the block of constructs to be executed. If a database update error is encountered, the second enclosed group of constructs (the *error handler*) is executed.

Comment

An explanation of what is accomplished by the constructs enclosed within the block, block assumptions, etc.

Error Message

Variable to hold the error message if an error is encountered within the protected code of this construct

COREscript Constructs Control

While Do Construct

A dialog box for the 'While Do Construct'. It has a light beige background. On the left side, there is a label 'Expression:' above a small 'Validate' button. To the right of the label is a large, empty rectangular text area with a vertical scrollbar on its right edge.

Description

This construct consists of two parts on different lines of the Report Editor's Script pane that may enclose other constructs indented between them. This construct implements loop logic. If the *expression* evaluates to *true*, the enclosed group of constructs is executed repeatedly until the *expression* evaluates to *false*. Note that the enclosed constructs are not guaranteed to be executed, since the *expression* is tested before any of them are executed.

Expression

An expression consisting of operators in the CORE expression language, variables defined using the Edit Variables command under the Properties menu of the Report Editor, and constants that can be coded in some data types. The result of this expression must be a Boolean.

Validate

Validates the syntax of the *expression* to ensure that neither operators nor operands appear in unexpected locations, all operators are recognized, and all variables have been defined. No type or bounds checking can be performed.

DATABASE QUERY CONSTRUCTS

Children Query

Arguments		Parameters
Object:	<input type="text" value="nil"/>	<div></div> <div>Add Remove</div>
Target Classes:	<input type="text" value="nil"/>	
Sort Block:	<input type="text" value="nil"/>	
Return:	<input type="text" value="nil"/>	
		<input type="text" value="Numeric by class"/>

Description

Assigns to the *return* variable the collection of all the elements in the CORE database that are targets of parent-child relationships with the *receiver* element. The parent-child relationships are defined by the parent-child relation established in the CORE schema for the class of the *receiver* element. There may be no parent-child relation for the class of the *receiver*. The parent-child relation is used to do attribute value roll-ups, where an attribute value in one element is computed from the corresponding attribute values in its children.

The children elements may not all be of the same class. To filter out all children except those in one or more particular classes, specify the *target classes* collection. The returned collection will be ordered according to the specified *sort block*.

Object

Variable containing the element to query.

Target Classes

Variable containing a collection of filter classes. Can be specified either by a variable from the drop-down on the left or manual additions into the collection on the right. Can be of any of the following data types:

- Array
- Bag
- Dictionary
- Ordered Collection
- Set
- Sorted Collection

Sort Block

Sort block definition of a sort block defined in the CORE project. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right. This sort criteria continues to govern the behavior of the sorted collection that results from this construct.

Return

Variable to hold the sorted collection of elements that results from this construct.

COREscript Constructs Database Query

Diagnostic Results Query

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Diagnostic:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a collection of strings representing the diagnostic errors for the specified element. The returned collection will be a set of strings.

Object

Variable containing the element to query.

Diagnostic

Symbol specifying which of the three diagnostic results is desired: completeness, consistency, or custom. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Return

Variable to hold the ordered collection of strings that is the result of this construct.

COREscript Constructs Database Query

Element Attribute Query

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Attribute:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the value of the specified *attribute* of the element in the CORE database specified by *object*. Returns *nil* if either the attribute has not been assigned a value or the user does not have sufficient permissions to view the value.

Object

Variable containing the element from the CORE database to query.

Attribute

Symbol naming the attribute which value is desired. The attribute should be defined in the CORE schema for the class of the *object*. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Return

Variable to hold the result of this construct.

COREscript Constructs Database Query

Element Defined Parameters Query

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a collection of the names of all parameters defined for the specified element. This is the collection of parameters that have been defined for the element (with or without values), not the collection of available parameters for the class. The returned collection will be a set of symbols.

Object

Variable containing the element to query.

Return

Variable to hold the set of parameter name symbols that is the result of this construct.

COREscript Constructs Database Query

Element Parameter Units Query

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Parameter:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the units string associated with the specified parameter for the specified element. For example, in the case of a parameter such as mass, the units might be kilograms. The construct will return nil if the parameter has not been defined for this element or the specified parameter does not support a units field.

Object

Variable containing the element to query.

Parameter

Symbol naming the parameter to be queried. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Return

Variable to hold the string that is the result of this construct.

COREscript Constructs Database Query

Element Parameter Value Query

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Parameter:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the value associated with the specified parameter for the specified element. The construct will return nil if the parameter has not been defined for this element.

Object

Variable containing the element to query.

Parameter

Symbol naming the parameter to be queried. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Return

Variable to hold the result of this construct.

COREscript Constructs

Database Query

Elements Query

	Arguments	Parameters
Database Class:	<input type="text" value="nil"/>	<input type="text"/>
Sort Block:	<input type="text" value="nil"/>	<input type="text" value="Numeric"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a collection of all the elements in the CORE database that are of the specified *class*. The returned collection will be ordered according to the specified *sort block*.

Database Class

Symbol naming a class defined in the CORE schema. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Sort Block

Sort block definition of a sort block defined in the CORE project. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right. This sort criteria continues to govern the behavior of the sorted collection that results from this construct.

Return

Variable to hold the sorted collection of elements that is the result of this construct.

COREscript Constructs Database Query

Named Element Query

	Arguments	Parameters
Database Class:	<input type="text" value="nil"/>	<input type="text"/>
Element Name:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	<input type="button" value="Select Element"/>

Description

Assigns to the *return* variable the element in the CORE database that has the specified name and is of the specified *class*. The construct will return nil if either the requested element is not in the database or the user does not have sufficient permissions to access the element.

Database Class

A class object defined in the CORE schema. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Element Name

Symbol naming the element to be returned. Can be specified either by a variable from the drop-down on the left or a manual selection using an element selection window opened by pressing the Select Element button.

Return

Variable to hold the result of the construct.

COREscript Constructs Database Query

Parents Query

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	<div></div> <div>Add Remove</div>
Target Classes:	<input type="text" value="nil"/>	
Sort Block:	<input type="text" value="nil"/>	<input type="text" value="Numeric by class"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the collection of all the elements in the CORE database that are sources (vice targets) of parent-child relationships with the *receiver* element (i.e., the *receiver* is the target of the relationships). The parent-child relationships are defined by parent-child relations established in the CORE schema with the class of the *receiver* element as the target class. The parent-child relation is used to do attribute value roll-ups, where attribute values of a child are used to compute the corresponding attribute values of its parents.

There is at most a single parent-child relation established for each class; however, since this operator views the relations in the opposite direction (i.e., their complements from child to parent), the class of the *receiver* may be a target class of multiple parent-child relations, each with a different source class. To filter out all parents except those in one or more particular classes, specify the *target classes* collection. The returned collection will be ordered according to the specified *sort block*.

Object

Variable containing the element to query.

Target Classes

Variable containing a collection of filter classes. Can be specified either by a variable from the drop-down on the left or manual additions into the collection on the right. Can be of any of the following data types:

- Array
- Bag
- Dictionary
- Ordered Collection
- Set
- Sorted Collection

Sort Block

Sort block definition of a sort block defined in the CORE project. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right. This sort criteria continues to govern the behavior of the sorted collection that results from this construct.

Return

Variable to hold the sorted collection of elements that results from this construct.

COREscript Constructs Database Query

Relationship Attribute Query

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Attribute:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the value of the specified *attribute* of the relationship in the CORE database specified by *object*.

Object

Variable containing the relationship from the CORE database to query.

Attribute

Symbol naming the attribute which value is desired. The attribute should be defined in the CORE schema for the relation of the *object*. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Return

Variable to hold the result of this construct.

COREscript Constructs Database Query

Relationships Query

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Relation:	<input type="text" value="nil"/>	<input type="text"/>
Target Classes:	<input type="text" value="nil"/>	<div><div></div><div>↑</div><div>↓</div></div>
		<div>AddRemove</div>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a collection of all the relationships in the CORE database that are of the specified *relation* and have the element specified by *object* as their source. To filter out all relationships except those, which targets are in one or more particular classes, specify the *target classes* collection.

Object

Variable containing the element from the CORE database to query.

Relation

Symbol naming a relation defined in the CORE schema. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Target Classes

Variable containing a collection of filter classes. Can be specified either by a variable from the drop-down on the left or manual additions into the collection on the right. Can be of any of the following data types:

- Array
- Bag
- Dictionary
- Ordered Collection
- Set
- Sorted Collection

Return

Variable to hold the set of relationships that results from this construct.

COREscript Constructs

Database Query

Root Folder Query

	Arguments	Parameters
Database Class:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the element folder object for the specified *class*. Each class has a root-level folder whose name is the name of the class.

Database Class

A class object defined in the CORE schema. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Return

Variable to hold the result from this construct.

COREscript Constructs Database Query

Targets Query

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Relation:	<input type="text" value="nil"/>	<input type="text"/>
Target Classes:	<input type="text" value="nil"/>	<div><div></div><div>↑</div><div>↓</div></div>
		<div>AddRemove</div>
Sort Block:	<input type="text" value="nil"/>	<input type="text" value="Numeric by class"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a collection of all the elements in the CORE database that are of the specified *relation* and have the element specified by *object* as their source. The returned collection will be ordered according to the specified *sort block*. To filter out all targets except those in one or more particular classes, specify the *target classes* collection.

Object

Variable containing the element from the CORE database to query.

Relation

Symbol naming a relation defined in the CORE schema. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Target Classes

Variable containing a collection of filter classes. Can be specified either by a variable from the drop-down on the left or manual additions into the collection on the right. Can be of any of the following data types:

- Array
- Bag
- Dictionary
- Ordered Collection
- Set
- Sorted Collection

Sort Block

Sort block definition of a sort block defined in the CORE project. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right. This sort criteria continues to govern the behavior of the sorted collection that results from this construct.

Return

Variable to hold the sorted collection of elements that results from this construct.

COREscript Constructs
Database Query

THIS PAGE INTENTIONALLY BLANK

DATABASE UPDATE CONSTRUCTS

Add Element To Folder

	Arguments	Parameters
Element:	<input type="text" value="nil"/>	
Folder:	<input type="text" value="nil"/>	

Description

Adds the specified *element* to the *folder* without removing the *element* from any other folder. If the user does not have write permission for the *element*, an error will be signaled.

Element

Variable containing the element to add to the folder.

Folder

Variable containing the folder to which the element should be added.

COREscript Constructs Database Update

Delete Object

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	

Description

Deletes the specified *object* (either an element, relationship, or folder) from the database. If the user does not have permission to delete the *object*, an error will be signaled.

Object

Variable containing the object (an element, relationship or folder) to be deleted.

COREscript Constructs Database Update

Lock Object

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	

Description

Locks the specified *object* (either an element, attribute, or parameter) against any changes regardless of the user permission. If the user does not have permission to administer the *object*, an error will be signaled.

Object

Variable containing the object (an element, attribute, or parameter) to be locked.

COREscript Constructs Database Update

Move Element To Folder

	Arguments	Parameters
Element:	<input type="text" value="nil"/>	
Source Folder:	<input type="text" value="nil"/>	
Target Folder:	<input type="text" value="nil"/>	

Description

Removes the specified *element* from the *source folder* and adds it to the *target folder*. Any other folders containing the *element* are unaffected. Note that if the source folder does not contain the specified *element*, no error will be signaled and the element will be added to the *target folder*.

If the user does not have write permission for the element, an error will be signaled.

Element

Variable containing the element to move.

Source Folder

Variable containing the folder from which to remove the *element*.

Target Folder

Variable containing the folder to which the *element* should be added.

COREscript Constructs

Database Update

New Element

	Arguments	Parameters
Database Class:	<input type="text" value="nil"/>	<input type="text"/>
Element Name:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Creates a new element of the specified *database class* with the specified *element name* and assigns it to the *return* variable. An error is signaled and *nil* is returned if the element cannot be created due to a name conflict or insufficient user permissions to create elements.

Database Class

Symbol naming a class defined in the CORE schema. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Element Name

Symbol naming the element to be created. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Return

Variable to hold the result of this construct – the new element if the operation is successful or *nil* if it is not.

COREscript Constructs Database Update

New Folder

	Arguments	Parameters
Parent Folder:	<input type="text" value="nil"/>	
Folder Name:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Creates a new folder with the specified *folder name* as a subfolder of *parent folder* and assigns it to the *return* variable. An error is signaled and *nil* is returned if the folder cannot be created due to a name conflict or insufficient user permissions to create folders.

Parent Folder

Variable containing the folder in which the new subfolder is to be created.

Folder Name

Symbol naming the folder to be created. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Return

Variable to hold the result of this construct – the new folder if the operation is successful or *nil* if it is not.

COREscript Constructs Database Update

New Relationship

	Arguments	Parameters
Source Element:	<input type="text" value="nil"/>	
Relation:	<input type="text" value="nil"/>	<input type="text"/>
Target Element:	<input type="text" value="nil"/>	
Return:	<input type="text" value="nil"/>	

Description

Creates a new relationship of type *relation* between the specified elements and assigns it to the *return* variable. An error is signaled and *nil* is returned if the relationship cannot be created due to a schema conflict, a database constraint, or insufficient user permissions to create the relationship.

Source Element

Variable containing the source element of the new relationship. This is equivalent to the element selected in CORE when selecting a relation name and issuing the “Add Targets” command.

Relation

Relation defined in the CORE schema. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Target Element

Variable containing the target of the new relationship. This is equivalent to the element specified in the “Add Targets” dialog in CORE.

Return

Variable to hold the result of this construct – the new relationship if the operation is successful or *nil* if it is not.

COREscript Constructs Database Update

Purge Attribute Versions

	Arguments	Parameters
Elements:	<input type="text" value="nil"/>	
Attributes:	<input type="text" value="nil"/>	
Type:	<input type="text" value="nil"/>	<input checked="" type="radio"/> Interim Versions <input type="radio"/> All Versions

Description

Purges the specified collection of attributes for the specified collection of elements. This construct provides scripting access to the purge attribute version and baseline attribute version commands in CORE. Unlike the commands available via the user interface, this construct allows purging attribute versions for a specific attribute or collection of attributes.

Elements

Variable containing the collection of elements for which you wish to purge attribute versions.

Attributes

Variable containing the names of the attributes for which you wish to purge attribute versions. If the collection is empty, CORE will purge versions for all attributes.

Type

Symbol indicating the type of purge to be performed. If the value is interim, the first version and current version will be maintained with all interim attribute versions being purged. For any other value, the current version will be marked as the baseline and all previous versions will be discarded.

COREscript Constructs Database Update

Remove Element From Folder

	Arguments	Parameters
Element:	<input type="text" value="nil"/>	
Folder:	<input type="text" value="nil"/>	

Description

Removes the specified *element* from the *folder*. If no other folder contains the specified *element*, it will automatically be added to the root folder for the database class.

If the user does not have write permission for the element, an error will be signaled.

Element

Variable containing the element to remove from the *folder*.

Folder

Variable containing the folder from which the *element* should be removed.

COREscript Constructs Database Update

Rename Element

	Arguments	Parameters
Element:	<input type="text" value="nil"/>	
New Name:	<input type="text" value="nil"/>	<input type="text"/>

Description

Changes the name of *element* from its current value to *new name*. An error is signaled if the user does not have permission to change the element name or if the new element name conflicts with an existing name (element names must be unique within a database class).

Element

Variable containing the element to be renamed.

New Name

Symbol specifying the new name for the *element*. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

COREscript Constructs Database Update

Rename Folder

	Arguments	Parameters
Folder:	<input type="text" value="nil"/>	
New Name:	<input type="text" value="nil"/>	<input type="text"/>

Description

Changes the name of *folder* from its current value to *new name*. An error is signaled if the user does not have permission to change the folder name or if the new folder name conflicts with an existing name (folder names must be unique within a parent folder just as directory names are unique in Microsoft Windows).

Folder

Variable containing the folder to be renamed.

New Name

Symbol specifying the new name for the *folder*. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

COREscript Constructs Database Update

Renumber Elements

	Arguments	Parameters
Root Element:	<input type="text" value="nil"/>	
Number:	<input type="text" value="nil"/>	<input type="text"/>
Sort Block:	<input type="text" value="nil"/>	<input type="text" value="Numeric"/>

Description

Renumbers *root element* and all of its descendants. The number attribute for *root element* is set to *number* and new hierarchical numbers are generated for the entire descendent tree. This is equivalent to the Renumber Element command in CORE.

Root Element

Variable containing the starting element for the renumber command.

Number

Hierarchical number specifying the new number for the *root element* and starting value for renumbering all descendants. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Sort Block

Sort block definition of a sort block defined in the CORE project. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right. For elements without structures such as FFBDs, this sort block governs the order in which descendants are renumbered.

COREscript Constructs Database Update

Set Element Attribute

	Arguments	Parameters
Element:	<input type="text" value="nil"/>	
Attribute:	<input type="text" value="nil"/>	<input type="text"/>
Value:	<input type="text" value="nil"/>	

Description

Sets the value of the specified *attribute* of the specified *element* to *value*. An error is signaled if the user does not have permission to change the attribute or if a type mismatch occurs (e.g., attempting to assign a string value to a numeric attribute).

Element

Variable containing the element from the CORE database to access.

Attribute

Symbol naming the attribute to be set. The attribute should be defined in the CORE schema for the class of the *element*. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Value

Variable containing the value to be assigned to the specified *attribute*.

COREscript Constructs Database Update

Set Element Diagnostic Results

	Arguments	Parameters
Element:	<input type="text" value="nil"/>	
Diagnostic Type:		<input type="text" value="consistency"/>
Value:	<input type="text" value="nil"/>	

Description

Sets the value of the specified *diagnostic type* of the specified *element* to *value*. The value specified replaces any existing diagnostic results. An error is signaled if the user does not have permission to change the element or if a type mismatch occurs.

Element

Variable containing the element from the CORE database to access.

Diagnostic Type

Name of the diagnostic results being set: consistency or custom. Specified by manual selection from the drop-down on the right. Note that completeness diagnostic results cannot be set via script since these are automatically computed and maintained by CORE.

Value

Variable containing the value (an ordered collection of strings) to be assigned to the specified *diagnostic type*.

COREscript Constructs Database Update

Set Element Parameter Units

	Arguments	Parameters
Element:	<input type="text" value="nil"/>	
Parameter:	<input type="text" value="nil"/>	<input type="text"/>
Value:	<input type="text" value="nil"/>	

Description

Sets the value of the units fields associated with the specified *parameter* of the specified *element* to *value*. An error is signaled if the user does not have permission to change the parameter or if the parameter does not support units.

Element

Variable containing the element from the CORE database to access.

Parameter

Symbol naming the parameter for which the units is to be set. The parameter should be defined in the CORE schema for the class of the *element*. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Value

Variable containing the value (a string) to be assigned to the units for the specified *parameter*.

COREscript Constructs Database Update

Set Element Parameter Value

	Arguments	Parameters
Element:	<input type="text" value="nil"/>	
Parameter:	<input type="text" value="nil"/>	<input type="text"/>
Value:	<input type="text" value="nil"/>	

Description

Sets the value of the specified *parameter* of the specified *element* to *value*. An error is signaled if the user does not have permission to change the parameter or if a type mismatch occurs (e.g., attempting to assign a string value to a numeric parameter).

Element

Variable containing the element from the CORE database to access.

Parameter

Symbol naming the parameter to be set. The parameter should be defined in the CORE schema for the class of the *element*. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Value

Variable containing the value to be assigned to the specified *parameter*.

COREscript Constructs Database Update

Set Relationship Attribute

	Arguments	Parameters
Relationship:	<input type="text" value="nil"/>	
Attribute:	<input type="text" value="nil"/>	<input type="text"/>
Value:	<input type="text" value="nil"/>	

Description

Sets the value of the specified *attribute* of the specified *relationship* to *value*. An error is signaled if the user does not have permission to change the attribute or if a type mismatch occurs (e.g., attempting to assign a string value to a numeric attribute).

Relationship

Variable containing the relationship from the CORE database to access.

Attribute

Symbol naming the attribute to be set. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Value

Variable containing the value to be assigned to the specified *attribute*.

COREscript Constructs Database Update

Unlock Object

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	

Description

Unlocks the specified *object* (either an element, attribute, or parameter) permitting future changes. If the user does not have permission to administer the *object*, an error will be signaled.

Object

Variable containing the object (an element, attribute, or parameter) to be locked.

FILE MANAGEMENT CONSTRUCTS

Close File

	Arguments	Parameters
File Name:	<input type="text" value="nil"/>	<input type="text"/>
Launch File:	<input type="text" value="nil"/>	<input type="radio"/> Yes <input type="radio"/> No <input checked="" type="radio"/> Prompt

Description

Closes the specified file. If an Open Output File construct is used or if a Set Default Output File construct is used in conjunction with one of the data output constructs, then a corresponding Close File construct should subsequently be included. If it is missing, the file is closed automatically.

File Name

String naming the file to close. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Launch File

Boolean designating whether or not to open the file in the associated application. Can also be nil in which case, the user will be prompted to launch the file or not. Can be specified either by a variable from the drop-down on the left or by selecting the desired option on the right.

COREscript Constructs

File Management

Open File Dialog

	Arguments	Parameters
Title:	<input type="text" value="nil"/>	<input type="text" value="Open File"/>
File Name:	<input type="text" value="nil"/>	<input type="text" value="*.csv"/>
Return:	<input type="text" value="nil"/>	

Description

Opens the common file dialog provided by the host operating system, allowing the user to navigate all accessible storage volumes and directory structures and to select a file to be opened for reading.

Title

Descriptive name appearing in the title bar of the common dialog. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right. The type of this parameter should be a string.

File Name

String specifying the default file name or filter, such as *.csv, to appear in the selection field of the common dialog. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right. The common dialog will automatically open on the last file location selected from within CORE. This can be overridden by specifying a variable that contains a full path name.

Return

Variable to hold the result of this construct, which is a string specifying the full path to the selected file, or *nil* if the user selects the Cancel button.

COREscript Constructs File Management

Open Input File

	Arguments	Parameters
File Name:	<input type="text" value="nil"/>	<input type="text"/>

Description

Opens the specified file for reading. It does no harm to open a file multiple times for input, but an error results if the file is already open for output. A file must be opened via this construct before it can be referenced in parsing constructs.

File Name

String naming the file to be opened. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right. If the full path is not specified, it is assumed to be relative to the working directory in which CORE was launched.

COREscript Constructs File Management

Open Output File

	Arguments	Parameters
File Name:	<input type="text" value="nil"/>	<input type="text"/>
File Type:	<input type="text" value="nil"/>	<input type="text" value="ASCII"/>
Overwrite File:	<input type="text" value="nil"/>	<input checked="" type="radio"/> Overwrite <input type="radio"/> Append

Description

Opens the file specified by the *file name*, which can then be used as the destination of subsequent output constructs and should be closed afterward.

File Name

String naming the file to open. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

File Type

Symbol specifying the desired file type. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

If Rich Text Format (RTF) is specified, all output will be in RTF format, which can include multiple font styles as well as embedded graphics and can be imported into word processors. If HTML is specified, appropriate text translations will be made automatically to conform to HTML requirements. You can also generate plain ASCII files to output the results of simple queries, to generate input for other parsers or tools, etc.

Overwrite File

Boolean object indicating whether an existing file should be overwritten. If the argument value is *true*, an existing file will be overwritten. If the argument value is *false*, the new contents will be appended to the bottom of any existing file contents. Can be specified either by a variable from the drop-down on the left or a manual selection using the radio buttons on the right.

COREscript Constructs

File Management

Open Temporary Output File

	Arguments	Parameters
File Extension:	<input type="text" value="nil"/>	<input type="text" value="TXT"/>
File Type:	<input type="text" value="nil"/>	<input type="text" value="ASCII"/>
Overwrite File:	<input type="text" value="nil"/>	<input checked="" type="radio"/> Overwrite <input type="radio"/> Append
Return:	<input type="text" value="nil"/>	

Description

Calculates a default file name based upon the report and the execution time and opens the file, which can then be used as the destination of subsequent output constructs and should be closed afterward. The file name is the concatenation of the report name, the current date, and the current time. The temporary file is automatically placed in a TEMP subfolder of the user's default output folder.

File Extension

String naming the file extension for the temporary file. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

File Type

Symbol specifying the desired file type. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

If RTF is specified, all output will be in RTF format, which can include multiple font styles as well as embedded graphics and can be imported into word processors. If HTML is specified, appropriate text translations will be made automatically to conform to HTML requirements. You can also generate plain ASCII files to output the results of simple queries, to generate input for other parsers or tools, etc.

Overwrite File

Boolean object indicating whether an existing file should be overwritten. If the argument value is *true*, an existing file will be overwritten. If the argument value is *false*, the new contents will be appended to the bottom of any existing file contents. Can be specified either by a variable from the drop-down on the left or a manual selection using the radio buttons on the right.

Return

Variable to hold the result of this construct, which is a string specifying the full path to the temporary file.

COREscript Constructs

File Management

Save File Dialog

	Arguments	Parameters
Title:	<input type="text" value="nil"/>	<input type="text" value="Save File"/>
File Name:	<input type="text" value="nil"/>	<input type="text" value="*.rtf"/>
Return:	<input type="text" value="nil"/>	

Description

Displays the standard Windows Save File dialog, prompting the user to select a file to open (for writing), and assigns the result to the *return* variable.

Title

String to use as the dialog window title. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

File Name

String specifying the default file name or filter, such as *.rtf, to appear in the selection field of the standard dialog. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right. The standard dialog will automatically open on the last file location selected from within. This can be overridden by specifying a variable that contains a full path name.

Return

Variable to hold the result of this construct, which is a string specifying the full path for the selected file, or nil if the user cancels the dialog.

COREscript Constructs File Management

Set Default Input File

	Arguments	Parameters
File Name:	<input type="text" value="nil"/>	<input type="text"/>

Description

Sets the default file used by parsing constructs when their *file* parameters are not specified and multiple files are open for reading. Before an input file can be set as the default, it must first be opened.

File Name

String naming the input file to be used as the default. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right. The value of this parameter should be identical to the file name with which the file was opened.

COREscript Constructs File Management

Set Default Output File

	Arguments	Parameters
File Name:	<input type="text" value="nil"/>	<input type="text"/>

Description

Sets the default file used by output constructs when their *file* parameters are not specified and multiple files are open for writing. This file must still be opened before it can be used.

File Name

String naming the default output file. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

OUTPUT CONSTRUCTS

Comma-Delimited Output

	Arguments	Parameters
Variable:	<input type="text" value="nil"/>	
Destination:	<input type="text" value="nil"/>	<input type="text" value="File"/>
File:	<input type="text" value="nil"/>	<input type="text"/>

Description

Outputs the contents of a *variable* formatted as a comma-delimited field. If the variable being output could contain a comma or other special character, the field is delimited by quotation marks and any embedded quotation marks are doubled (dates, time stamps, strings, and text blocks are output in this manner). Otherwise, the variable is output in standard format.

Variable

Variable whose contents is to be output in comma-delimited format.

Destination

Symbol specifying whether the output should be directed to a file, the on-screen transcript, both a file and the on-screen transcript, or a CORE2net stream.

File

String specifying the name of the destination file to which the variable is to be output.

COREscript Constructs Output

Diagram File Output

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
File:	<input type="text" value="nil"/>	<input type="text"/>
File Type:	<input type="text" value="nil"/>	<input type="text"/>
Diagram Type:	<input type="text" value="nil"/>	<input type="text"/>
Display Mode:	<input type="text" value="nil"/>	<input type="text" value="Use Stored View"/>
Diagram Scale:	<input type="text" value="nil"/>	<input type="text"/>
Black & White:	<input type="text" value="nil"/>	<input type="radio"/> Black & White <input checked="" type="radio"/> Color
Hierarchy Type:	<input type="text" value="nil"/>	<input type="text"/>
Relations:	<input type="text" value="nil"/>	<div><div></div><div>Add Remove</div></div>
Target Classes:	<input type="text" value="nil"/>	<div><div></div><div>Add Remove</div></div>
Create Node Map:	<input type="text" value="nil"/>	<input type="radio"/> Yes <input checked="" type="radio"/> No
Return:	<input type="text" value="nil"/>	

Description

Outputs any CORE database or schema diagram as a graphics file. A diagram can be output in either WMF, JPG, PNG, BMP, or SVG format.

Optionally, for JPG and PNG formats, assigns to the *return* variable an ordered collection of diagram entity locators each of which corresponds to a hotspot on the output diagram.

Object

Variable containing an object of one of the following data types:

- Class
- Element
- Facility

File

String naming the *destination* of file output. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

File Type

Symbol specifying the desired file type. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Diagram Type

Symbol specifying the diagram type to output. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Display Mode

Symbol specifying the mode to use when displaying the diagram (with respect to diagram content marked for hiding). Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

The available display modes correspond to the options available on the diagram view within CORE.

Standard

Shows all diagram content. No visible markings indicate any diagram objects that have been marked to hide. The standard view is most appropriate for engineers and analysts as they architect and define the system.

Marked

Displays all diagram content but shows content that will be hidden with dotted lines.

Hidden (with label)

Does not display diagram content marked as hidden. Layouts are compacted such that there is no layout cue that content is missing. The diagram frame is marked in the upper-right corner to indicate that content has been hidden.

Hidden

Does not display diagram content marked as hidden. Layouts are compacted such that there is no layout cue that content is missing. No marking is placed on the diagram frame. This mode is most appropriate for use with customers so that they can focus on the diagram content (rather than thinking about what has been hidden).

Use Stored View

Uses the diagram view settings as specified and saved in CORE.

Diagram Scale

Scale (as a percentage of the original diagram size) at which the diagram is to be output.

Black & White

Boolean indicating whether the diagram should be forced to black and white (as opposed to color). Can be specified either by a variable from the drop-down on the left or a manual selection from the buttons on the right.

Hierarchy Type

Symbol specifying the type of hierarchy diagram or spider diagram to be produced. Only meaningful if *diagram type* is set to "Hierarchy Diagram" or "Spider Diagram" and *object* is an Element. Can be any hierarchy type defined in the CORE project. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Relations

Collection of symbols naming relations to traverse in computing the closure of the specified element *object*. Used if the specified diagram is a custom hierarchy (i.e., *diagram type* is set to "Hierarchy Diagram" and *hierarchy type* is empty). Can be specified either by a variable from the drop-down on the left or manual additions into the collection on the right. The best kind of collection to use is a set.

Target Classes

Variable containing a collection of filter classes. Used if the specified diagram is a custom hierarchy (i.e., *diagram type* is set to "Hierarchy Diagram" and *hierarchy type* is empty). Can be specified either by a variable from the drop-down on the left or manual additions into the collection on the right. Can be of any of the following data types:

- Array
- Bag
- Dictionary
- Ordered Collection
- Set
- Sorted Collection

COREscript Constructs Output

Create Node Map

Boolean indicating whether a node map for the diagram should be generated. Can be specified either by a variable from the drop-down on the left or a manual selection from the buttons on the right.

Return

Variable to hold the result of this construct. It is either an ordered collection of diagram entity locators or *nil* depending on the setting of *create node map*.

COREscript Constructs Output

Diagram Output

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Destination:	<input type="text" value="nil"/>	<input type="text" value="File"/>
File:	<input type="text" value="nil"/>	<input type="text"/>
Diagram Type:	<input type="text" value="nil"/>	<input type="text"/>
Display Mode:	<input type="text" value="nil"/>	<input type="text" value="Use Stored View"/>
Width:	<input type="text" value="nil"/>	<input type="text"/>
Height:	<input type="text" value="nil"/>	<input type="text"/>
Black & White:	<input type="text" value="nil"/>	<input type="radio"/> Black & White <input checked="" type="radio"/> Color
Hierarchy Type:	<input type="text" value="nil"/>	<input type="text"/>
Relations:	<input type="text" value="nil"/>	<div><div></div><div>Add Remove</div></div>
Target Classes:	<input type="text" value="nil"/>	<div><div></div><div>Add Remove</div></div>

Description

Encodes any CORE database or schema diagram as a graphic in an RTF file.

The diagram is reduced to the scale at which its height is less than or equal to the specified maximum *height* and its width is less than or equal to the specified maximum *width* (e.g., to ensure that it fits on a page). Whichever scaling factor is more restrictive is used to reduce both dimensions proportionally. This construct is not useful if the transcript is selected as the *destination* or if file output is chosen and the specified *file* was opened in ASCII mode.

Object

Variable containing an object of one of the following data types:

- Class
- Element
- Facility

Destination

Symbol specifying that output be directed either to a *file*, to an on-screen text transcript, to both a file and the on-screen transcript, or to a CORE2net stream. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

COREscript Constructs Output

File

String naming the *destination* of file output. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Diagram Type

Symbol specifying the diagram type to output. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Display Mode

Symbol specifying the mode to use when displaying the diagram (with respect to diagram content marked for hiding). Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

The available display modes correspond to the options available on the diagram view within CORE.

Standard

Shows all diagram content. No visible markings indicate any diagram objects that have been marked to hide. The standard view is most appropriate for engineers and analysts as they architect and define the system.

Marked

Displays all diagram content but shows content that will be hidden with dotted lines.

Hidden (with label)

Does not display diagram content marked as hidden. Layouts are compacted such that there is no layout cue that content is missing. The diagram frame is marked in the upper-right corner to indicate that content has been hidden.

Hidden

Does not display diagram content marked as hidden. Layouts are compacted such that there is no layout cue that content is missing. No marking is placed on the diagram frame. This mode is most appropriate for use with customers so that they can focus on the diagram content (rather than thinking about what has been hidden).

Use Stored View

Uses the diagram view settings as specified as specified and saved in CORE.

Width

Float specifying the maximum width of the diagram (used in conjunction with the *height* to determine diagram scale). Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Height

Float specifying the maximum width of the diagram (used in conjunction with the *width* to determine diagram scale). Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Black & White

Boolean indicating whether the diagram should be forced to black and white (as opposed to color). Can be specified either by a variable from the drop-down on the left or a manual selection from the buttons on the right.

Hierarchy Type

Symbol specifying the type of hierarchy diagram or spider diagram to be produced. Only meaningful if *diagram type* is set to "Hierarchy Diagram" or "Spider Diagram" and *object* is an element. Can be any hierarchy type defined in the CORE project. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Relations

Collection of symbols naming relations to traverse in computing the closure of the specified element *object*. Used if the specified diagram is a custom hierarchy (i.e., *diagram type* is set to "Hierarchy Diagram" and *hierarchy type* is empty.) Can be specified either by a variable from the drop-down on the left or manual additions into the collection on the right. The best kind of collection to use is a set.

COREscript Constructs Output

Target Classes

Variable containing a collection of filter classes. Used if the specified diagram is a custom hierarchy (i.e., *diagram type* is set to “Hierarchy Diagram” and *hierarchy type* is empty). Can be specified either by a variable from the drop-down on the left or manual additions into the collection on the right. Can be of any of the following data types:

- Array
- Bag
- Dictionary
- Ordered Collection
- Set
- Sorted Collection

COREscript Constructs Output

Element Output

The dialog box is titled "COREscript Constructs Output" and is divided into two main sections: "Arguments" and "Parameters".

Arguments:

- Object:** A dropdown menu with "nil" selected.
- Destination:** A dropdown menu with "nil" selected.
- File:** A dropdown menu with "nil" selected.
- Representation:** A list box containing "Element Name".

Parameters:

- Field Properties:** A text area containing the text: "An element field will display the name of the element . No additional properties are required."

Buttons:

- Add:** A button to add a new representation field.
- Remove:** A button to remove a representation field.
- Up/Down arrows:** Two small buttons for navigating between fields.

Radio Buttons:

- ☐ Class Name
- ☒ Element Name
- ☐ Attribute
- ☐ Targets
- ☐ Text

Description

Represents an element *object* from the CORE database in the report output. The amount and format of the information included from the element is determined by its *representation*.

Object

Variable containing an element to be referenced in or from which information is to be extracted for report output.

Destination

Symbol specifying that output be directed to either a *file*, an on-screen text transcript, both a file and the on-screen transcript, or a CORE2net stream. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

File

String naming the *destination* of file output. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Representation

Ordered collection of representation fields, each of which can be the alias of the element's class, the name of the element itself, the value of an attribute defined for the class, the targets of a relation, or hard-coded text.

Class Name

Outputs the alias of the element's class, if defined, or the class name if the alias is undefined.

Element Name


Outputs the name of the element.

COREscript Constructs Output

Attribute

Outputs the attribute value for the specified *attribute* with boilerplate text before and after the value. For each **Attribute** field, the desired *attribute* must be selected from the drop-down list.

If the attribute value is *nil*, nothing is output. Otherwise, the *before* text is output first, followed by the attribute value, and finally the *after* text is output. If boilerplate text is desired regardless of whether or not a value exists, the boilerplate text should be specified in a **Text** representation field instead of an **Attribute** representation field.

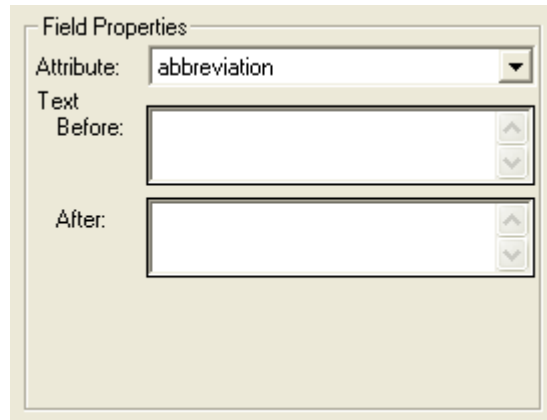


The image shows a 'Field Properties' dialog box for an 'Attribute' field. It has a title bar 'Field Properties'. Inside, there is a label 'Attribute:' followed by a drop-down menu showing 'abbreviation'. Below this, under the 'Text' section, there are two text input fields. The first is labeled 'Before:' and the second is labeled 'After:'. Each text field has small up and down arrow buttons to its right.

Targets

Outputs the targets for the specified *relation* with boilerplate text before and after the target list as well as text to separate individual targets in the list. For each **Targets** field, the desired *relation* and *sort block* must be selected from the drop-down lists. The *sort block* specifies not only in what order to output the targets but also what form the representation should take.

If no targets exist for the specified relation, nothing is output. Otherwise, the *before* text is output first, followed by the list of targets separated by the *between* text, and finally the *after* text is output. If boilerplate text is desired regardless of whether or not targets exist, the boilerplate text should be specified in a **Text** representation field instead of a **Targets** representation field.

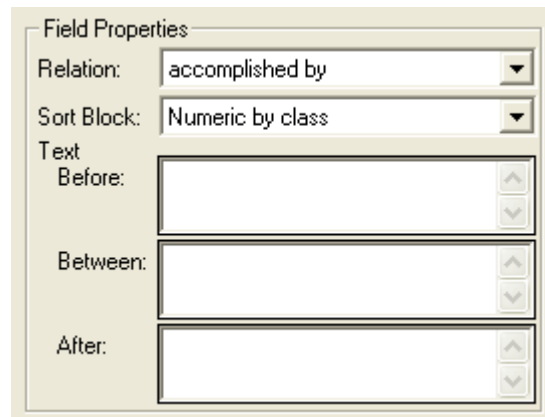

The image shows a 'Field Properties' dialog box for a 'Targets' field. It has a title bar 'Field Properties'. Inside, there are two drop-down menus. The first is labeled 'Relation:' and shows 'accomplished by'. The second is labeled 'Sort Block:' and shows 'Numeric by class'. Below these, under the 'Text' section, there are three text input fields. The first is labeled 'Before:', the second is labeled 'Between:', and the third is labeled 'After:'. Each text field has small up and down arrow buttons to its right.


Text

Outputs the boilerplate text specified in the *text* field.

COREscript Constructs Output


Field Properties

Text:

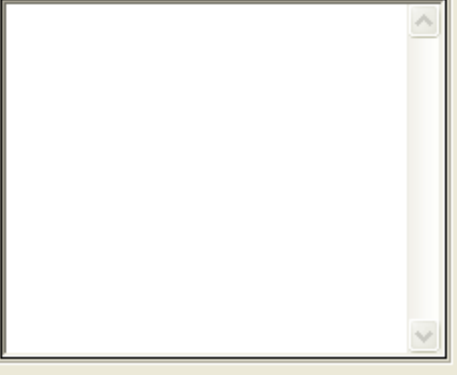

COREscript Constructs Output

Include External Boilerplate

	Arguments	Parameters
Include File:	<input type="text" value="nil"/>	<input type="text" value=""/> 
Destination:	<input type="text" value="nil"/>	<input type="text" value="File"/>
File:	<input type="text" value="nil"/>	<input type="text" value=""/>

Description

Imports an external *file* into a report. This is only meaningful if the specified *destination* is a file and the file was opened in RTF mode. Any file type is supported that can be read and understood by the word processor into which the RTF file will ultimately be imported.

Include File

String naming the file to be imported. Can be specified either by a variable from the drop-down on the left or by browsing using the button on the right. The file browse button opens a standard Windows file dialog prompting the user to select a file for importation.

Destination


Symbol specifying that output be directed to either a *file*, an on-screen text transcript, both a file and the on-screen transcript, or a CORE2net stream. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

File

String naming the *destination* of file output. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

COREscript Constructs Output

Include External Graphic

	Arguments	Parameters
Include File:	<input type="text" value="nil"/>	<input type="text" value=""/> 
Destination:	<input type="text" value="nil"/>	<input type="text" value="File"/>
File:	<input type="text" value="nil"/>	<input type="text" value=""/>

Description

Imports an external graphics *file* into a report. This is only meaningful if the specified *destination* is a file and the file was opened in RTF mode. Any picture type is supported that can be read and understood by the word processor into which the RTF file will ultimately be imported.

Include File

String naming the graphics file to be imported. Can be specified either by a variable from the drop-down on the left or by browsing using the button on the right. The file browse button opens a standard Windows file dialog prompting the user to select a file for importation.

Destination

A symbol specifying that output be directed to either a *file*, an on-screen text transcript, both a file and the on-screen transcript, or a CORE2net stream. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

File

String naming the *destination* of file output. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

COREscript Constructs Output

Include Style Sheet

Arguments Parameters

Style Sheet:
Extract

Ignore DB Formatting: nil ☐ Yes ☒ No

Destination: nil File

File: nil

Description

Places a style sheet in a report *file*, on the report transcript, or both. This is only meaningful if the *destination* is a file, and the *file* is opened in RTF mode. Only one style sheet can be included in a script.

Style Sheet

A block of text containing style commands in the RTF language to parse and output. The easiest way to create this is to define your desired styles in a word processor, save the document in RTF format, and use the Extract button to have CORE copy the style header from the RTF file into this field. Word processors can also pull styles from multiple documents into a single document.

Ignore DB Formatting

Boolean indicating whether any styles associated with element text attributes output by the script should be removed upon output. Can be specified either by a variable from the drop-down on the left or manual selection from the buttons on the right.

Destination

Symbol specifying that output be directed to either a *file*, an on-screen text *transcript*, both a file and the on-screen transcript, or a CORE2net stream. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

File

String naming the *destination* of file output. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

COREscript Constructs Output

RDT Output

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Destination:	<input type="text" value="nil"/>	<input type="text" value="File"/>
File:	<input type="text" value="nil"/>	<input type="text"/>
Include Attributes:	<input type="text" value="nil"/>	<input checked="" type="radio"/> Yes <input type="radio"/> No
Include Relationships:	<input type="text" value="nil"/>	<input checked="" type="radio"/> Yes <input type="radio"/> No
Include Structure:	<input type="text" value="nil"/>	<input checked="" type="radio"/> Yes <input type="radio"/> No
Include Folders:	<input type="text" value="nil"/>	<input checked="" type="radio"/> Yes <input type="radio"/> No
Include Access Control:	<input type="text" value="nil"/>	<input checked="" type="radio"/> Yes <input type="radio"/> No
Include Stored Views:	<input type="text" value="nil"/>	<input checked="" type="radio"/> Yes <input type="radio"/> No

Description

Outputs information from an element *object* in the CORE database in .rdt format that can be imported into CORE. The amount of information included from the element is determined by the include toggles.

Object

Variable containing an element from which information is to be extracted for output.

Destination

Symbol specifying that output be directed to either a *file*, an on-screen text transcript, both a file and the on-screen transcript, or a CORE2net stream. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

File

String naming the *destination* of file output. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Include Toggles

A series of toggles indicating whether or not the element attributes, relationships, structure, class folders, access control information, and stored view descriptions are to be included in the output. Can be specified either by a variable from the drop-down on the left or a manual selection from the Yes or No buttons on the right. If a variable is used, it must contain a Boolean value. The value of *true* corresponds to the button choice of Yes. The value of *false* corresponds to the button choice of No.

COREscript Constructs Output

Set Style

	Arguments	Parameters
Style:	<input type="text" value="nil"/>	<input type="text"/>
Destination:	<input type="text" value="nil"/>	<input type="text" value="File"/>
File:	<input type="text" value="nil"/>	<input type="text"/>

Description

Sets the formatting *style* for subsequent output to a *file*. This is only meaningful if the file is opened in RTF mode. The *style* must previously have been included in the report.

Style

String naming a style. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

To populate the list on the right use the Load Style Sheet command on the Script menu to select the CORE report that includes the style sheet to be used. The styles will then be available in the drop down.

Destination

A symbol specifying that output be directed to either a *file*, an on-screen text transcript, both a file and the on-screen transcript, or a CORE2net stream. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

File

String naming the *destination* of file output. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

COREscript Constructs Output

Table Output

	Arguments	Parameters
Collection:	<input type="text" value="nil"/>	
Destination:	<input type="text" value="nil"/>	<input type="text" value="File"/>
File:	<input type="text" value="nil"/>	<input type="text"/>
Table Definition:	<input type="text" value="nil"/>	<input type="text"/>
Width:	<input type="text" value="nil"/>	<input type="text"/>
Show Banded Output:	<input type="text" value="nil"/>	<input checked="" type="radio"/> Yes <input type="radio"/> No
Merge Non-Repeat Cells:	<input type="text" value="nil"/>	<input checked="" type="radio"/> Yes <input type="radio"/> No
Ignore Sort Block:	<input type="text" value="nil"/>	<input type="radio"/> Yes <input checked="" type="radio"/> No
Ignore Filter:	<input type="text" value="nil"/>	<input type="radio"/> Yes <input checked="" type="radio"/> No

Description

Builds a table using a collection of elements and the specified table definition, properly encoding the resulting table in an RTF, HTML, or text file. This construct reuses the same table definitions used in the Import from CSV and Export to CSV/Word commands for easy inclusion of formatted tables in reports.

Note: This construct is not available in CORE2net.

Collection

Name of a variable containing the collection over which to iterate, which can be of one of the following data types:

- Array
- Bag
- Dictionary
- Ordered Collection
- Set

If the collection is a dictionary, this construct iterates over the values stored in the dictionary, not the keys whereby the values are accessed.

The values contained in the collection must be of type Element.

Destination

Symbol specifying that output be directed either to a *file*, to an on-screen text transcript, to both a file and the on-screen transcript, or to a CORE2net stream. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

File

String naming the *destination* of file output. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Table Definition

Table definition of a table defined in the CORE project. This specifies the columns and formatting of the table as well as any filtering or sorting applied to the *collection*. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

COREscript Constructs Output

Width

Float specifying the width of the table. This value is only used in formatting RTF tables where it sets the width of the table and the individual columns are then sized based upon the relative weights in the table definition. (HTML column widths are set based upon the weights in the table definition, and columns in text files are unformatted.) Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Show Banded Output

Boolean indicating whether the rows of the table should be shaded to reflect alternating bands. This value is only used in formatting RTF tables. (Banding of HTML rows is controlled via CSS, and text files do not include style information.) Can be specified either by a variable from the drop-down on the left or a manual selection from the buttons on the right.

Merge Non-Repeat Cells

Boolean indicating whether child rows with non-repeated values should be merged. When generating tables, it is quite common to generate multiple rows based upon a single element. In this situation, if this setting is TRUE the cells in the corresponding column will be merged. (See Export to Word in the CORE help for more information). This value is only used in formatting RTF tables. Can be specified either by a variable from the drop-down on the left or a manual selection from the buttons on the right.

Ignore Sort Block

Boolean indicating whether the sort block specified as part of the table definition should be ignored. If TRUE, the order of the *collection* is preserved. If FALSE, the *collection* is sorted based upon the table definition sort block. Can be specified either by a variable from the drop-down on the left or a manual selection from the buttons on the right.

Ignore Filter

Boolean indicating whether the filter specified as part of the table definition should be ignored. If TRUE, the contents of the *collection* will not be filtered, and all elements in the *collection* will be included in the table. If FALSE, the *collection* is filtered based upon the table definition filter. Can be specified either by a variable from the drop-down on the left or a manual selection from the buttons on the right.

COREscript Constructs Output

Tag Output

	Arguments	Parameters
Tag:	<input type="text" value="nil"/>	<input type="text"/>
Destination:	<input type="text" value="nil"/>	<input type="text" value="File"/>
File:	<input type="text" value="nil"/>	<input type="text"/>

Description

Places the *tag* text in the script output. Like the Text Output construct except that no translation is performed on the *tag*. This allows the direct output of RTF and HTML commands.

Tag

A text string. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Destination

A symbol specifying that output be directed to either a *file*, an on-screen text transcript, both a file and the on-screen transcript, or a CORE2net stream. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

File

String naming the *destination* of file output. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

COREscript Constructs Output

Text Output

	Arguments	Parameters
Text:	<div></div>	
Destination:	<div>nil</div>	<div>File</div>
File:	<div>nil</div>	<div></div>

Description

Places fixed *text* in the output.

Text

A text string to output. Both carriage return-line feeds and tab spacing are allowed in this field.

Destination

A symbol specifying that output be directed to either a *file*, an on-screen text transcript, both a file and the on-screen transcript, or a CORE2net stream. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

File

String naming the *destination* of file output. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

COREscript Constructs Output

Variable Output

	Arguments	Parameters
Variable:	<input type="text" value="nil"/>	
Text Before:	<input type="text" value="nil"/>	<input type="text"/>
		<input type="text"/>
Text After:	<input type="text" value="nil"/>	<input type="text"/>
		<input type="text"/>
Destination:	<input type="text" value="nil"/>	<input type="text" value="File"/>
File:	<input type="text" value="nil"/>	<input type="text"/>

Description

Places a string representation of the object contained in the specified *variable* in a report output with boilerplate text before and after the string.

If the variable is *nil*, nothing is output. Otherwise the *text before* is output first, followed by the *variable* value, and finally the *text after* is output. If boilerplate text is desired regardless of whether or not a value exists, the boilerplate text should be specified in a Text Output Construct rather than in a Variable Output Construct.

Variable

Variable whose value is to be output.

Text Before

Text to be output before outputting the *variable* value if it exists.

Text After

Text to be output after outputting the *variable* value if it exists.

Destination

A symbol specifying that output be directed to either a *file*, an on-screen text transcript, both a file and the on-screen transcript, or a CORE2net stream. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

File

String naming the *destination* of file output. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

PARSING CONSTRUCTS

At End

	Arguments	Parameters
File:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a Boolean value indicating whether or not the current position pointer in the specified *file* is at the end of the *file*. An error results if the *file* has not previously been opened for input.

File

String naming the input file to be tested. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right. The value of this parameter should be identical to the *file name* with which the file was opened. If this parameter is not specified, the default input file is tested.

Return

Variable to hold the result of this construct.

COREscript Constructs Parsing

Get Position

	Arguments	Parameters
File:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the integer index of the current position pointer in the input stream specified by the *file* parameter. An error results if the *file* has not previously been opened for input. This construct can be used to temporarily record a point in the *file* in order to return to it later using the Set Position construct.

File

A string naming the input file to be queried. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right. The value of this parameter should be identical to the *file name* with which the file was opened. If this parameter is not specified, the default input file is queried.

Return

Variable to hold the result of this construct.

COREscript Constructs Parsing

Next

	Arguments	Parameters
File:	<input type="text" value="nil"/>	<input type="text"/>
Access:		<input checked="" type="radio"/> Character <input type="radio"/> Word <input type="radio"/> Line
Return:	<input type="text" value="nil"/>	

Description

Parses a string from the specified *file*, beginning at the current position in the *file*, advances the current position pointer past what has been read, and assigns the string to the *return* variable. An error results if the *file* has not previously been opened for input.

File

A string naming the input file to be read. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right. The value of this parameter should be identical to the *file name* with which the file was opened. If this parameter is not specified, the default input file is read.

Access

Determines how much is read from the specified *file*. If this parameter is set to *Character*, the next byte is read and converted to a string. An error results if the current position pointer in the *file* is at the end of the *file*.

If this parameter is set to *Word* and the current position in the *file* is the end of the *file*, then this construct returns *nil*. Otherwise, it skips forward from the current position to the first alphabetic or numeric character it encounters or to the end of the file. It then reads any contiguous sequence of letters and digits beginning at that point, stopping, if necessary, at the end of the *file*. This construct may return an empty string if there are no letters or digits remaining in the *file*.

If this parameter is set to *Line*, then this construct reads all characters up to the next line feed, the next carriage return and line feed combination, or the end of the *file*. If the current position in the *file* is at the end of the *file*, then this construct returns an empty string.

Return

Variable to hold the result of this construct.

COREscript Constructs Parsing

Peek

	Arguments	Parameters
File:	<input type="text" value="nil"/>	<input type="text"/>
Access:		<input checked="" type="radio"/> Character <input type="radio"/> Word <input type="radio"/> Line
Return:	<input type="text" value="nil"/>	

Description

Parses a string from the specified *file*, beginning at the current position in the *file*, and assigns the string to the *return* variable. An error results if the *file* has not previously been opened for input. This construct differs from the *Next* construct in that the current position pointer in the *file* is **not** advanced, such that the next parsing construct to be invoked begins at the same point in the input stream.

File

A string naming the input file to be read. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right. The value of this parameter should be identical to the *file name* with which the file was opened. If this parameter is not specified, the default input file is read.

Access

Determines how much is read from the specified *file*. If this parameter is set to *Character*, the next byte is read and converted to a string. Unlike the *Next* construct, an error does **not** result if the current position pointer in the *file* is at the end of the *file*. Instead, this construct returns *nil*.

If this parameter is set to *Word* and the current position in the *file* is the end of the *file*, then this construct returns *nil*. Otherwise, it skips forward from the current position to the first alphabetic or numeric character it encounters or to the end of the file. It then reads any contiguous sequence of letters and digits beginning at that point, stopping, if necessary, at the end of the *file*. This construct may return an empty string if there are no letters or digits remaining in the *file*.

If this parameter is set to *Line*, then this construct reads all characters up to the next line feed, the next carriage return and line feed combination, or the end of the *file*. Unlike the *Next* construct, if the current position in the *file* is at the end of the *file*, then this construct returns *nil*.

Return

Variable to hold the result of this construct.

COREscript Constructs Parsing

Set Position

	Arguments	Parameters
File:	<input type="text" value="nil"/>	<input type="text"/>
Position:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Moves the current position pointer in the specified *file* to the specified *position*. An error results if the *file* has not previously been opened for input.

File

A string naming the input file which position pointer is to be moved. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right. The value of this parameter should be identical to the *file name* with which the file was opened. If this parameter is not specified, the position pointer of the default input file is set.

Position

An integer specifying the index of the position in the specified *file* to which its position pointer is to be set. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Note that file positions are zero-based – that is, the beginning of a file is index 0, and the position at the index equal to the size of the file (where the At End construct returns *true*) is **after** the last byte of the file. An error results if the specified position is negative or greater than the size of the file.

Return

Variable to hold the result of this construct, which is an integer specifying the previous position pointer in the specified *file*, the position at the time this construct was invoked.

COREscript Constructs Parsing

Size

	Arguments	Parameters
File:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable an integer, which is the number of bytes in the specified *file*. An error results if the *file* has not previously been opened for input.

File

A string naming the input file to be queried. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right. The value of this parameter should be identical to the *file name* with which the file was opened. If this parameter is not specified, the default input file is queried.

Return

Variable to hold the result of this construct.

COREscript Constructs Parsing

Skip

	Arguments	Parameters
File:	<input type="text" value="nil"/>	<input type="text"/>
Skip:		<input checked="" type="radio"/> Over Separators <input type="radio"/> To First Alphanumeric <input type="radio"/> To Character
Character:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Advances the current position pointer in the specified *file* to the specified place in its input stream. Note that the position might not have to change in order for the conditions implied by the *skip* parameter to be met (i.e., the input stream might already be positioned at the desired type of object). An error results if the *file* has not previously been opened for input.

File

A string naming the input file which position pointer is to be moved. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right. The value of this parameter should be identical to the *file name* with which the file was opened. If this parameter is not specified, the position pointer of the default input file is set.

Skip

Specifies how far the current position pointer advances through the specified *file* by informing the report writer what kind of object to skip over or to skip to in the input stream. If this parameter is set to *Over Separators*, then the parser skips up to the first non-white space character or up to the end of the file. White space is defined as spaces, tabs, carriage returns, line feeds, and form feeds.

If this parameter is set to *To First Alphanumeric*, then the parser skips all characters until it encounters the first letter or digit after the point in the input stream at which this construct began or until it reaches the end of the file.

If this parameter is set *To Character*, then the report author can select a variable containing a printable character or can manually type a character in the field corresponding to this choice, and, when this construct is invoked, the parser will advance to the next occurrence of the specified character in the input stream or to the end of the file. Or the report author can choose a non-printable character from the drop-down list corresponding to this choice, and, when this construct is invoked, the parser will advance to the next occurrence of the specified character in the input stream or to the end of the file.

Character

If a variable is specified in this field and the *To Character* radio button is selected, then the parser attempts to match in the input stream the value of this variable instead of any character that has been manually entered in the field next to the radio button.

Return

Variable to hold the result of this construct, which is an integer specifying the previous position pointer in the specified *file*, the position at the time this construct was invoked.

COREscript Constructs Parsing

Up To

	Arguments	Parameters
File:	<input type="text" value="nil"/>	<input type="text"/>
Character:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Advances the current position pointer in the specified *file* to the specified place in its input stream and assigns to the *return* variable the string of all characters (if any) over which the pointer was advanced. Note that the position might not have to change in order for the conditions implied by the *up to* parameter to be met (i.e., the input stream might already be positioned at the desired type of object). An error results if the *file* has not previously been opened for input.

File

A string naming the input file to be read. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right. The value of this parameter should be identical to the *file name* with which the file was opened. If this parameter is not specified, the default input file is read.

Character

If a variable is specified in this field, then the parser reads from the input stream until it encounters the value of this variable. If a special character is required (such as a carriage return, line feed, tab, or space) it can be specified using the drop-down list in the argument pane.

Return

Variable to hold the result of this construct.

PROJECT QUERY CONSTRUCTS

Project Property

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Property:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

The Project Property Query construct assigns to the *return* variable the value of the specified *property* for the given project *object*.

Object

Project in the CORE database for which the property value is desired. Note that this argument is a project object itself, not the name of a project.

Property

Symbol naming the property of which the value is desired. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right. The available properties are the following:

<i>basePath</i>	a string that is the full path set in the Base Path property for the project. Returns <i>nil</i> if this path has not been set.
<i>completenessCheckerName</i>	a descriptive string indicating the completeness check level currently in use for the project.
<i>creationStamp</i>	the time stamp (combination of date and time) at which the project was created.
<i>creator</i>	a symbol that is the name of the user that created the project.
<i>customerAddress</i>	formatted text that is the contents of the project Customer Address property. Returns <i>nil</i> if this property is empty.
<i>customerName</i>	a string that is the contents of the project Customer Name property. Returns <i>nil</i> if this property is empty.
<i>description</i>	formatted text that is the contents of the project Description property. Returns <i>nil</i> if this property is empty.
<i>guidance</i>	formatted text that is the contents of the project Guidance property. Returns <i>nil</i> if this property is empty.
<i>lastAccessedStamp</i>	the time stamp (combination of date and time) at which the project was last read from.
<i>modificationStamp</i>	the time stamp (combination of date and time) at which the project property was last modified.
<i>name</i>	a symbol that is the name of the project
<i>organizationAddress</i>	formatted text that is the contents of the project Organization Address property. Returns <i>nil</i> if this property is empty.
<i>organizationName</i>	a string that is the contents of the project Organization Name property. Returns <i>nil</i> if this property is empty.
<i>schemaBaselineName</i>	a string that is the name of the schema selected as the base schema when the project was created.
<i>schemaVersion</i>	a hierarchical number that is the version (e.g., 8.0, 9.0) of the schema being used in the project.

COREscript Constructs Project Query

Return

Variable to hold the result of this construct.

COREscript Constructs

Project Query

Project Query

	Arguments	Parameters
Name:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

The Project Query construct assigns to the *return* variable the project object specified by its *name*.

Name

Symbol naming the desired project. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Return

Variable to hold the result of this construct, which is a project object in the CORE database.

COREscript Constructs Project Query

Project Registry Query

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Key:	<input type="text" value="nil"/>	
Return:	<input type="text" value="nil"/>	

Description

Returns the value associated with the specified *key* in the project registry. If the value has not been set, returns nil.

Object

Project in the CORE database from which the registry value is to be retrieved. Note that this argument is a project object, not the name of a project.

Key

Symbol specifying the name of the registry entry to be accessed.

Return

Variable to hold the result of this construct.

COREscript Constructs Project Query

Projects

	Arguments	Parameters
Return:	<input type="text" value="nil"/>	

Description

The Projects construct returns a collection of all projects defined in the CORE database.

Return

Variable to hold the result of this construct, which is a set of projects. Note that the objects in the set are project objects themselves, not the names of projects.

COREscript Constructs Project Query

Remove Project Registry Key

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Key:	<input type="text" value="nil"/>	

Description

Removes the entry associated with the specified *key* from the project registry. Returns an error if the user does not have the project administrator permissions necessary to remove a registry entry.

Object

Project in the CORE database from which registry value is to be removed. Note that this argument is a project object, not the name of a project.

Key

Symbol specifying the name of the registry entry to be accessed.

COREscript Constructs Project Query

Set Project

	Arguments	Parameters
Project:	<input type="text" value="nil"/>	
Return:	<input type="text" value="nil"/>	

Description

Sets the project for subsequent database and schema queries. If not explicitly set using a Set Project construct, project is defaulted to the project associated with the window from which a script is run.

Project

Project in the CORE database from which subsequent retrievals are to be made. Note that this argument is a project object, not the name of a project.

Return

Project in the CORE database that is the previously set project. Note that this argument is a project object, not the name of a project.

COREscript Constructs Project Query

Set Project Registry Value

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Key:	<input type="text" value="nil"/>	
Value:	<input type="text" value="nil"/>	

Description

Sets the specified *value* at the specified *key* in the project registry. Returns an error if the user does not have write permission to the project.

Object

Project in the CORE database for which the registry value is to be set. Note that this argument is a project object, not the name of a project.

Key

Symbol specifying the name of the registry entry to be set.

Value

Variable to hold the result of this construct.

PROMPTING CONSTRUCTS

Composite Prompt

	Arguments	Parameters
Title:	<input type="text" value="nil"/>	<input type="text" value="Information"/>
Message:	<input type="text" value="nil"/>	<input type="text"/>

Description

Composite prompt allows the report author to replace a series of individual prompt windows with a single, combined prompt. The Composite Prompt construct acts as a block and combines all of the enclosed prompts into a single dialog displayed to the user during report execution. Note that only prompt constructs can be inserted within a Composite Prompt block.

Arguments and parameters for individual prompting constructs within the Composite Prompt block operate in exactly the same manner as when a prompt is used separately. The only difference is that the individual prompts are combined into a form-type dialog.

Title

String to use as the dialog window title. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Message

String to use as the notification message displayed at the top of the dialog. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

COREscript Constructs Prompting

Drop-Down Selection Prompt

	Arguments	Parameters
Collection:	nil	Select <div></div>
Title:	nil	
Message:	nil	
Return:	nil	

Description

Selection prompts allow the report to prompt the user to select one or more items from a list. The Drop-Down Selection Prompt construct prompts the user to select one string from a drop-down list representing a *collection* of strings and assigns the selected string to the *return* variable. CORE automatically tracks user selections and uses the last selection as the initial / default selection when the report is run again. Note that if the Cancel button is pressed, *nil* is returned.

Collection

Collection of strings from which to select. Can be of one of the following data types:

- Array
- Bag
- Dictionary
- Ordered Collection
- Set
- Sorted Collection

If the collection is a dictionary, the strings should be the values stored in the dictionary, not the keys whereby other values are accessed.

Title

String to use as the dialog window title. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Message

String to use as the notification message displayed in the dialog. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Return

Variable to hold the result of this construct, which is a string or *nil*.

COREscript Constructs Prompting

Element Selection Prompt

The dialog box is titled 'Element Selection Prompt'. It is divided into two main sections: 'Arguments' and 'Parameters'.
Under 'Arguments', there are seven dropdown menus:
- 'Classes:' set to 'nil'
- 'Title:' set to 'nil'
- 'Class Label:' set to 'nil'
- 'Candidate Label:' set to 'nil'
- 'Default Class:' set to 'nil'
- 'Default Element:' set to 'nil'
- 'Return:' set to 'nil'
Under 'Parameters', there is a large empty list box. Below it are two buttons: 'Add' and 'Remove'. Below the list box are three input fields:
- 'Select an Element'
- 'Classes'
- 'Candidates'
At the bottom right of the dialog is a button labeled 'Select Element'.

Description

The Element Selection Prompt construct displays an action dialog allowing the user to select one element from any class in the collection of *classes* and assigning the selection to the *return* variable. If no element is selected or if the Cancel button is pressed, then this construct returns *nil*.

If a default class or element is specified, these will be highlighted when the dialog is presented during execution. If no defaults are specified, CORE automatically tracks user selections and uses the last selections as the initial / default selection when the report is run again.

Classes

Collection of valid classes from which the user may select an element. Can be of any of the following data types:

- Array
- Bag
- Dictionary
- Ordered Collection
- Set
- Sorted Collection

Title

String to be used as the dialog window title. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Class Label

String to be used as the label for the class pane. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Candidate Label

String to be used as the label for the pane listing all elements in the selected class. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Default Class

A class object to be used as the default class selection in the prompt. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

COREscript Constructs Prompting

Default Element

Symbol naming the default element to be selected in the dialog. Can be specified either by a variable from the drop-down on the left or a manual selection using an element selection window opened by pressing the Select Element button.

Return

Variable to hold the result of this construct, which is an element or *nil*.

COREscript Constructs Prompting

Message Prompt

	Arguments	Parameters
Title:	<input type="text" value="nil"/>	<input type="text" value="Information"/>
Message:	<input type="text" value="nil"/>	<div><div></div><div></div></div>

Description

The Message Prompt construct displays a notification dialog for the user. The user must close the dialog before proceeding.

Title

String to use as the dialog window title. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Message

String to use as the notification message displayed in the dialog. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

COREscript Constructs Prompting

Multiple Selection Prompt

	Arguments	Parameters
Collection:	<input type="text" value="nil"/>	
Title:	<input type="text" value="nil"/>	<input type="text" value="Select"/>
Object Label:	<input type="text" value="nil"/>	<input type="text" value="Objects"/>
Selection Label:	<input type="text" value="nil"/>	<input type="text" value="Selections"/>
Sort Selections:	<input type="text" value="nil"/>	<input checked="" type="radio"/> Yes <input type="radio"/> No
Return:	<input type="text" value="nil"/>	

Description

Selection Prompts allow the report to prompt the user to select one or more items from a list. The Multiple Selection Prompt construct prompts the user to select one or more objects from a list and assigns the collection of selected objects to the *return* variable. Each object is represented as a string in the list presented to the user. Note that if the Cancel button is pressed, *nil* is returned. If the OK button is pressed without selecting an item from the list, an empty collection is returned.

CORE automatically tracks user selections and uses the last selections as the initial / default selection when the report is run again.

Collection

Collection of objects from which to select. Can be of one of the following data types:

- Array
- Bag
- Dictionary
- Ordered Collection
- Set
- Sorted Collection

If the collection is a dictionary, the user-selectable objects should be the values stored in the dictionary, not the keys whereby other values are accessed.

Title

String to be used as the dialog window title. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Object Label

Indicates the string with which to label the candidate list (the list from which selections are being made). Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Selection Label

Indicates the string with which to label the list of selected items. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Sort Selections

Boolean object indicating whether or not the selections should be. If the argument value is *true*, this construct returns the user selections in a sorted collection using a simple comparison on the objects in the collection as the sort criterion (but each type of object handles the comparison in its own way). If the argument value is *false*, the selections are returned in the *collection* in the order selected by the user. Can be specified either by a variable from the drop-down on the left or a manual selection from the buttons on the right.

COREscript Constructs Prompting

Return

Variable to hold the selected subset of the *collection* described above. It may be *nil* or a sorted collection.

COREscript Constructs Prompting

Project Explorer Prompt

	Arguments	Parameters
Title:	<input type="text" value="nil"/>	<input type="text" value="Select Project Segment"/>
Message:	<input type="text" value="nil"/>	<input type="text" value="Select the desired segment of the project."/>
Include Project:	<input type="text" value="nil"/>	<input checked="" type="radio"/> Yes <input type="radio"/> No
Include Packages:	<input type="text" value="nil"/>	<input checked="" type="radio"/> Yes <input type="radio"/> No
Include Folders:	<input type="text" value="nil"/>	<input checked="" type="radio"/> Yes <input type="radio"/> No
Return:	<input type="text" value="nil"/>	

Description

Project Explorer Prompts display an expandable tree view of the database allowing the user to select a single item. Depending upon the options selected, the user can select from packages, folders, or the entire database. The selected object is assigned to the *return* variable. Note that if the Cancel button is pressed, *nil* is returned.

CORE automatically tracks user selections and uses the last selection as the initial / default selection when the report is run again.

Title

String to use as the dialog window title. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Message

String to use as the notification message displayed in the dialog. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Include Project

Boolean indicating whether or not the project should be included in the tree view as a possible selection. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Include Packages

Boolean indicating whether or not packages should be included in the tree view as a possible selection. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Include Folder

Boolean indicating whether or not folders should be included in the tree view as a possible selection. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Return

Variable to hold the selected object or *nil*.

COREscript Constructs Prompting

Prompt Separator

When executed as part of a composite prompt, this construct displays a horizontal separator between the prompt fields.

There are no parameters to set for a separator construct.

Description

When used within a Composite Prompt block, the Prompt Separator draws a horizontal line separating one set of fields from the next set of fields. Using this construct helps visually group and separate items on the composite prompt.

When used outside of a Composite Prompt block, this construct has no effect.

COREscript Constructs Prompting

Report Settings Prompt

The Report Settings Prompt construct was removed from CORE in version 7. The "prepared by" and "prepared for" information can be accessed via the Report Settings Access Construct but the prompt is no longer available.

This construct remains as a placeholder allowing legacy reports to run without error.

Description

Beginning with CORE 7, the values previously accessed as report settings have been migrated to project properties. The "prepared by" fields are now the organization name / address properties. The "prepared for" fields are now the customer name / address properties.

Though the constructs are ignored during execution, they remain in the construct language as placeholders allowing existing reports that use these constructs to execute without error.

COREscript Constructs Prompting

Single Selection Prompt

	Arguments	Parameters
Collection:	<input type="text" value="nil"/>	
Title:	<input type="text" value="nil"/>	<input type="text" value="Select"/>
Object Label:	<input type="text" value="nil"/>	<input type="text" value="Objects"/>
Return:	<input type="text" value="nil"/>	

Description

Selection Prompts allow the report to prompt the user to select one or more items from a list. The Single Selection Prompt construct prompts the user to select a single object from a list and assigns the selection to the *return* variable. Each object is represented as a string in the list presented to the user. Note that if the Cancel button is pressed, *nil* is returned.

CORE automatically tracks user selections and uses the last selection as the initial / default selection when the report is run again.

Collection

Collection of objects from which to select. Can be of one of the following data types:

- Array
- Bag
- Dictionary
- Ordered Collection
- Set
- Sorted Collection

If the collection is a dictionary, the user-selectable objects should be the values stored in the dictionary, not the keys whereby other values are accessed.

Title

String to use as the dialog window title. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Object Label

Indicates the string with which to label the pane displaying the currently selected object, if any. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Return

Variable to hold the selected object or *nil*.

COREscript Constructs Prompting

Value Prompt

	Arguments	Parameters
Title:	<input type="text" value="nil"/>	<input type="text" value="Information"/>
Message:	<input type="text" value="nil"/>	<input type="text"/>
Default:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	<input type="text"/>

Description

The Value Prompt construct prompts the user to enter a string before continuing and assigns it to the *return* variable. Note that if the Cancel button is pressed, an empty string is returned.

If a default value is specified, this will be shown as the initial / default value when the dialog is presented during execution. If no default is specified, CORE automatically tracks user input and uses the input as the initial / default value when the report is run again.

Title

String to be used as the dialog window title. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Message

String to be used as the notification message displayed in the dialog. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Default

Initial string to be displayed and selected in the entry field when the prompt is opened. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Return

Variable to hold the string entered by the user.

COREscript Constructs Prompting

YesOrNo Prompt

The screenshot shows a configuration window for the 'YesOrNo Prompt' construct. It is divided into two main sections: 'Arguments' on the left and 'Parameters' on the right. In the 'Arguments' section, there are four labels with corresponding input fields: 'Title:' with a dropdown menu showing 'nil', 'Message:' with a dropdown menu showing 'nil', 'Default:' with no input field, and 'Return:' with a dropdown menu showing 'nil'. In the 'Parameters' section, there is a label 'Information' with a text input field containing the word 'Information'. Below this field are two radio buttons: 'Yes' (which is selected) and 'No'.

Description

The YesOrNo Prompt construct asks the user a yes/no question and assigns to the *return* variable a Boolean *true* if the user clicks on the Yes button or a Boolean *false* if the user clicks on the No button.

Because a default value (yes or no) is always specified in this construct, this value will be shown as the initial / default selection each time the report is run.

Title

String to be used as the dialog window title. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Message

String to be used as the notification message displayed in the dialog. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Default

A Boolean indicating which button is the default button. If the object is *true*, then the default is the Yes button. If the object is *false*, then the default is the No button. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Return

Variable to hold the result of this construct, which is a Boolean.

SCHEMA QUERY CONSTRUCTS

Attribute Definition Property

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Property:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the value of the specified *property* for the given attribute definition.

Object

Attribute definition from the CORE schema for which the property value is desired.

Property

Symbol naming the property which value is desired. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Return

Variable to hold the result of this construct.

COREscript Constructs Schema Query

Class Attributes

	Arguments	Parameters
Class:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a collection of all attribute definitions for the specified *class*. These definitions can then be queried for their property values (e.g., name, type) as necessary.

Class

A class defined in the CORE schema for which the attribute definitions are desired. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right. Note that this argument is a class object itself, not just the name of a class.

Return

Variable to hold the result of this construct, which is a sorted collection of attribute definitions ordered alphabetically by display name.

COREscript Constructs Schema Query

Class Parameters

	Arguments	Parameters
Class:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a collection of all parameter definitions for the specified *class*. These definitions can then be queried for their property values (e.g., name, type) as necessary.

Class

A class defined in the CORE schema for which the attribute definitions are desired. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right. Note that this argument is a class object itself, not just the name of a class.

Return

Variable to hold the result of this construct, which is a sorted collection of parameter definitions ordered alphabetically by display name.

COREscript Constructs Schema Query

Class Property

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Property:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the value of the specified *property* for the given class *object*.

Object

Class in the CORE schema for which the property value is desired. Note that this argument is a class object itself, not just the name of a class.

Property

Symbol naming the property which value is desired. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Return

Variable to hold the result of this construct.

COREscript Constructs Schema Query

Class Query

	Arguments	Parameters
Name:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the class object specified by its *name*.

Name

Symbol naming the desired class. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Return

Variable to hold the result of this construct, which is a class object in the CORE schema.

COREscript Constructs Schema Query

Class Relations

	Arguments	Parameters
Class:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a collection of all relations from the specified *class*. These definitions can then be queried for their property values (e.g., name, complement) as necessary.

Class

A class defined in the CORE schema for which the relations are desired. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right. Note that this argument is a class object itself, not just the name of a class.

Return

Variable to hold the result of this construct, which is a sorted collection of relations ordered alphabetically by name.

COREscript Constructs Schema Query

Class Target Classes

	Arguments	Parameters
Class:	<input type="text" value="nil"/>	<input type="text"/>
Relation:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a collection of all classes defined in the CORE schema as targets of the specified *relation* from the specified *class*. Relationships defined by the *relation* can be created in the CORE database with elements of the specified *class* as the source and elements of the target classes as targets, subject to the limitations imposed by the user in the schema.

Class

Class defined in the CORE schema for which the target classes of the specified *relation* are desired. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right. Note that this argument is a class object itself, not just the name of a class.

Relation

Relation defined in the CORE schema for which the target classes are desired. Should be a valid relation from the specified *class*. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right. Note that this argument is a relation object itself, not just the name of a relation.

Return

Variable to hold the result of this construct, which is a sorted collection of class objects ordered alphabetically by display name.

COREscript Constructs Schema Query

Database Classes

	Arguments	Parameters
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a collection of all concrete (i.e., non-abstract) classes in the schema.

Return

Variable to hold the result of this construct, which is an ordered collection of classes ordered alphabetically by display name. Note that the objects in the collection are class objects themselves, not just the names of classes.

COREscript Constructs Schema Query

Facilities

	Arguments	Parameters
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a collection of all facilities defined in the CORE schema.

Return

Variable to hold the result of this construct, which is a sorted collection of facilities ordered alphabetically by name. Note that the objects in the collection are facility objects themselves, not just the names of facilities.

COREscript Constructs Schema Query

Facility Database Classes

	Arguments	Parameters
Facility:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a collection of all concrete (i.e., non-abstract) classes defined in the CORE schema as belonging to the specified *facility*.

Facility

Facility in the CORE schema to be queried. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right. Note that this argument is a facility object itself and not just the name of a facility.

Return

Variable to hold the result of this construct, which is an ordered collection of classes ordered alphabetically by display name. Note that the objects in the collection are class objects themselves, not just the names of classes.

COREscript Constructs Schema Query

Facility Property

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Property:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the value of the specified *property* for the given facility *object*.

Object

Facility in the CORE schema for which the property value is desired. Note that this argument is a facility object, not just the name of a facility.

Property

Symbol naming the property which value is desired. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Return

Variable to hold the result of this construct.

COREscript Constructs Schema Query

Facility Query

	Arguments	Parameters
Name:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the facility object specified by its *name*.

Name

Symbol naming the desired facility. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Return

Variable to hold the result of this construct, which is a facility object in the CORE schema.

COREscript Constructs Schema Query

Facility Schema Classes

	Arguments	Parameters
Facility:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a collection of all abstract and concrete classes used to identify the classes in the CORE schema that belong to the specified *facility*.

Facility

Facility in the CORE schema to be queried. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right. Note that this argument is a facility object itself and not just the name of a facility.

Return

Variable to hold the result of this construct, which is a sorted collection of classes ordered alphabetically by display name. Note that the objects in the collection are class objects themselves, not just the names of classes.

COREscript Constructs Schema Query

Parameter Definition Property

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Property:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the value of the specified *property* for the given parameter definition.

Object

Parameter definition from the CORE schema for which the property value is desired.

Property

Symbol naming the property which value is desired. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Return

Variable to hold the result of this construct.

COREscript Constructs Schema Query

Relation Attributes

	Arguments	Parameters
Relation:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a collection of all attribute definitions for the specified *relation*. These definitions can then be queried for their property values (e.g., name, type) as necessary.

Relation

A relation defined in the CORE schema for which the attribute definitions are desired. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right. Note that this argument is a relation object itself, not just the name of a class.

Return

Variable to hold the result of this construct, which is a sorted collection of attribute definitions ordered alphabetically by display name.

COREscript Constructs Schema Query

Relation Property

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Property:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the value of the specified *property* for the given relation *object*.

Object

Relation in the CORE schema for which the property value is desired. Note that this argument is a relation object itself, not just the name of a relation.

Property

Symbol naming the property which value is desired. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Return

Variable to hold the result of this construct.

COREscript Constructs Schema Query

Relation Query

	Arguments	Parameters
Name:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the relation object specified by its *name*.

Name

Symbol naming the desired relation. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Return

Variable to hold the result of this construct, which is a relation object in the CORE schema.

COREscript Constructs Schema Query

Relations

	Arguments	Parameters
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a collection of all relations in the schema.

Return

Variable to hold the result of this construct, which a sorted collection of relations ordered alphabetically by name. Note that the objects in the collection are relation objects themselves, not just the names of relations.

COREscript Constructs Schema Query

Schema Classes

	Arguments	Parameters
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a collection of all classes in the schema.

Return

Variable to hold the result of this construct, which a sorted collection of classes ordered alphabetically by name. Note that the objects in the collection are class objects themselves, not just the names of classes.

THIS PAGE INTENTIONALLY BLANK

SIMULATION CONSTRUCTS

Resource Level Query

	Arguments	Parameters
Object:	<input type="text" value="nil"/>	
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the currently available amount of the specified resource if the resource is used in the scope of the current model being simulated. If the resource is defined but not utilized by the model, the construct returns the initial value of the resource. If the resource is undefined, the construct returns zero.

Object

Variable containing the element in the Resource class from the CORE database to query.

Return

Variable to hold the result of this construct, which is either a float or integer depending on the Amount Type attribute of the Resource element.

Note: Only available to Simulation scripts.

COREscript Constructs Simulation

Script Context Query

	Arguments	Parameters
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the context in which the script is executing (i.e., the Function element in the case of a Begin Logic, Duration, End Logic, Exit Logic, or Timeout attribute; the Resource element in the case of a Maximum Amount attribute; and the relationship object in the case of an Amount attribute).

Return

Variable to hold the result of this construct, which is either a Function, Resource, or relationship object.

Note: Only available to Simulation scripts.

COREscript Constructs Simulation

Simulator Property Query

	Arguments	Parameters
Property:		<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the selected simulator *property* during simulation execution.

Property

The simulator property to be returned. This field is a drop-down list with the following selections:

<i>areLinksConstrained</i>	a Boolean that is true if the Link constraints are being applied, false otherwise.
<i>executionContext</i>	the simulation model context providing access to the actual execution instances of functions in execution and the items being exchanged.
<i>executionPath</i>	a collection from most recent to most distant showing the functional decomposition that has resulted in this specific execution instance of the function.
<i>time</i>	the current simulation clock time
<i>timeLimit</i>	user set simulation clock time at which the simulation will automatically be terminated if it has not already completed. Returns <i>nil</i> if it has not been set.

Return

Variable to hold the result of this construct.

Note: Only available to Simulation scripts.

THIS PAGE INTENTIONALLY BLANK

UTILITIES CONSTRUCTS

Available Diagrams Query

Arguments		Parameters
Diagram Query:		allAvailableViews
Return:	nil	

Description

Returns an *OrderedCollection* of diagram types (represented as symbols) sorted in alphabetical order. Using the construct insulates the script against changes between versions and editions of CORE, providing a standard mechanism to access the various collections of diagrams.

Diagram Query

Desired collection of available views to return (allAvailableViews, behavioralViews, physicalInterfaceViews, or physicalViews). Can be specified by selection from the drop-down on the right.

Return

Variable to hold the result of this construct.

Beep

(No settings required)

Description

Beeps the system speaker.

COREscript Constructs Utilities

Breakpoint

	Arguments	Parameters
Single Line Fields:	<input type="text" value="nil"/>	<input type="text" value="2"/>
Multiple Line Fields:	<input type="text" value="nil"/>	<input type="text" value="2"/>
List Panes:	<input type="text" value="nil"/>	<input type="text" value="2"/>

Description

Stops script execution and opens a debugger on the current script.

Single Line Fields

An integer specifying the number of entry fields to display values in the debugger (good for dates, strings, integers, elements, etc.).

Multiple Line Fields

An integer specifying the number of formatted text fields to display large blocks of information (good for text fields such as descriptions).

List Panes

An integer specifying the number of list panes to display collections (intended for collections such as arrays, ordered collections, and dictionaries).

Although any variable can be displayed in any pane, it is most valuable to use the pane best suited for that variable.

Cancel Report

(No settings required)

Description

Aborts the execution of the script. This is the same as if the Cancel button on the progress indicator is pressed.

Note: Not available to Simulation scripts.

COREscript Constructs Utilities

Change Indicator

	Arguments	Parameters
Message:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Allows the report to change the message currently displayed in the progress indicator. This is a useful technique to keep the individual running a report informed of the status. Note that the prior message is assigned to the *return* variable.

Message

String to be displayed. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Return

Variable to hold the result of this construct, which is the previously displayed string.

Note: Not available to Simulation scripts.

COREscript Constructs Utilities

Color Query

	Arguments	Parameters
Color:		<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the selected color specification. Using this construct, utility scripts can be written to assign element colors based upon a specific conditions (e.g., set the fill color for open Issues to bright green, assign the fill color for all functions allocated to human Components to lavender).

Color


Color to be selected. Can be specified by selection from the drop-down on the right.

Return

Variable to hold the result of this construct.

COREscript Constructs Utilities

Comment

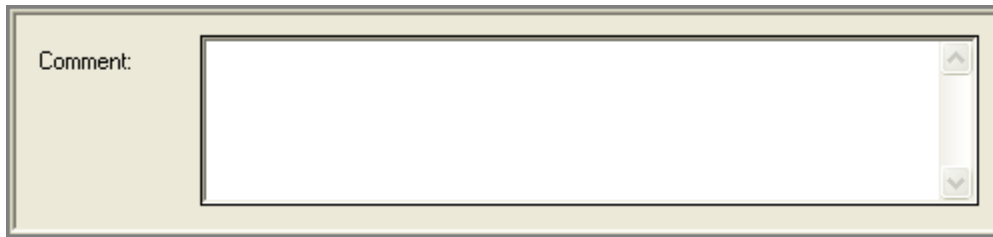

Description

Comment allows the script author to add internal comments to document the script.

Comment

An explanation of what is accomplished by following constructs, assumptions made, etc.

COREscript Constructs Utilities

Expire Output

	Arguments	Parameters
Expiration Stamp:	<input type="text" value="nil"/>	<input type="text"/>

Description

Expire Output is used in a CORE2net script to tell a browser when to 'expire' the output page. Expire Output sets the 'Expires' flag within the HTTP header of the output document.

Expiration Stamp

A time stamp that ensures the latest database updates are shown in CORE2net output.

Open Transcript

(No settings required)

Description

Opens the report transcript. Note that this happens automatically if “Transcript” or “Both [File and Transcript]” is specified as the destination of an output construct or if an error is encountered.

COREScript Constructs Utilities

Send Mail Message

	Arguments	Parameters
To:	<input type="text" value="nil"/>	<div><div></div><div></div><div></div></div> <div>Add Remove</div>
cc:	<input type="text" value="nil"/>	<div><div></div><div></div><div></div></div> <div>Add Remove</div>
bcc:	<input type="text" value="nil"/>	<div><div></div><div></div><div></div></div> <div>Add Remove</div>
Subject:	<input type="text" value="nil"/>	<input type="text"/>
Priority:	<input type="text" value="nil"/>	<input type="text" value="Normal"/>
Body:	<input type="text" value="nil"/>	<div><div></div><div></div><div></div></div>
Attachments:	<input type="text" value="nil"/>	<div><div></div><div></div><div></div></div> <div>Add Remove</div>

Description

Allows a script to send an e-mail message. This could be used in a script to notify users of any database modifications after a specific date and time.

Requires that MAPI32.dll be enabled. If Microsoft mail options have been installed and configured, this .dll should be enabled. If CORE does not allow you to utilize the send feature contact your network system administrator to verify that this .dll is enabled.

Addresses

Ordered Collections of the To, cc, and bcc distribution addresses. Each collection can be specified by a variable from the drop-down on the left or a manual entry using the buttons on the right.

Subject

String containing the subject line of the message. Can be specified either by a variable from the drop-down on the left or a manual entry of the text on the right.

Priority

Symbol designating the delivery priority of the message. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Body

COREscript Constructs

Utilities

String containing the text of the message. Can be specified either by a variable from the drop-down on the left or a manual entry of the text on the right.

Attachments

Ordered collection of full path names for files to be attached to the message. Can be specified either by a variable from the drop-down on the left or a manual identification of each file on the right.

COREscript Constructs Utilities

System Property Query

	Arguments	Parameters
Property:		<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable the value of the *property*.

Property

The system property to be returned. This field is a drop-down list with the following selections:

<i>allReportScripts</i>	a dictionary of all reports scripts available to the CORE project. Each value is a string that is the full path for the scripts with a key that is a string containing the name of the script.
<i>baselineSchemaName</i>	the name of the schema selected as the base schema when the current project was created.
<i>commonScriptDirectory</i>	a string that is the full path for the directory of Common scripts. The value is context sensitive to whether it is executed from a report or CORE2net script.
<i>commonScriptURI</i>	a string that is the Uniform Resource Identifier (URI) for the directory of Common CORE2net scripts.
<i>currentScriptDirectory</i>	a string that is the full path for the directory of the script that is being executed
<i>date</i>	the current date
<i>mainScriptDirectory</i>	a string that is the full path for the directory of Main scripts. The value is context sensitive to whether it is executed from a report or CORE2net script.
<i>mainScriptURI</i>	a string that is the Uniform Resource Identifier (URI) for the directory of Main CORE2net scripts.
<i>outputDirectory</i>	the full path of the Output directory as set in User Preferences.
<i>project</i>	the current project.
<i>repositoryName</i>	a string that is the full path for the current repository file
<i>schemaVersion</i>	a hierarchical number which is the version (e.g., either 4.0 or 5.0) of the schema being used in the project.
<i>selectedElement</i>	the element selection in the current window.
<i>selectedElements</i>	the set of element selected in the current window.
<i>selectedFolder</i>	the folder selected in the current window.
<i>selectedPackage</i>	the package selected in the current window.
<i>time</i>	the current time.
<i>timeStamp</i>	the current time stamp (combination of the date and time).
<i>user</i>	the current system user.
<i>userAgent</i>	a user agent object that represents the browser in use in a CORE2net session. Note that this object responds to name (returns a string), isInternetExplorer (returns a Boolean), and isNetscape (returns a Boolean).
<i>userScriptDirectory</i>	a string that is the full path for the directory of User scripts. The value is context sensitive to whether it is executed from a report or CORE2net script.

COREscript Constructs Utilities

<i>userScriptURI</i>	a string that is the Uniform Resource Identifier (URI) for the directory of User CORE2net scripts.
-----------------------------	--

Return

Variable to hold the specified system property. Unless otherwise stated, a system property is returned as an object.

THIS PAGE INTENTIONALLY BLANK

VARIABLE MANIPULATION CONSTRUCTS

Database Object Sort

The screenshot shows a dialog box titled "Database Object Sort". It has two tabs: "Arguments" and "Parameters". Under the "Arguments" tab, there are several fields: "Collection:" with a dropdown menu showing "nil", "Ascending:" with a dropdown menu showing "nil", "Iteration Variable:" with an empty text field, "Expression:" with a large text area, and "Return:" with a dropdown menu showing "nil". There is a "Validate" button next to the "Expression:" field. Under the "Parameters" tab, there are two radio buttons: "True" (which is selected) and "False".

Description

Assigns to the *return* variable a new ordered collection containing all the same objects as are in the *collection* to be sorted. The objects in the new collection are ordered so that when substituted for the *iteration variable* in the specified *expression*, the value that results for each one is less than or equal to the value that results when the object in the next higher ordinal position within the new collection is substituted for the *iteration variable* in the specified *expression*. Note that the original *collection* is not modified.

Collection

Variable containing a collection of objects to be sorted. Can be of one of the following data types:

- Array
- Bag
- Dictionary
- Ordered Collection
- Set
- Sorted Collection
- String
- Symbol

If the collection is a dictionary, the objects in the returned collection and the objects that are assigned to the *iteration variable* as described above are the values stored in the dictionary, not the keys whereby the values are accessed. If the collection is a string or symbol, this construct returns a collection of its characters in a new order.

Ascending

Boolean object indicating whether the collection should be sorted in ascending or descending order. If the argument value is *false*, this construct returns the objects in the *collection* in descending order. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Iteration Variable

String specifying the name of a variable referenced in the *expression*. This variable is declared within the scope of this construct but will not be accessible after this construct terminates.

Expression

Indicates the criterion to be used in sorting. An expression consists of operators in the CORE expression language, variables defined using the Edit Variables command under the Properties menu of the Report Editor, constants that can be coded in some data types, and the *iteration variable* described above.

COREscript Constructs

Variable Manipulation

Validate

Validates the syntax of the *expression* to ensure that neither operators nor operands appear in unexpected locations, all operators are recognized, and all variables have been defined. No type or bounds checking can be performed.

Return

Variable to hold the result of this construct, which is an ordered collection.

COREscript Constructs

Variable Manipulation

Element Sort

	Arguments	Parameters
Collection:	<input type="text" value="nil"/>	
Sort Block:	<input type="text" value="nil"/>	<input type="text" value="Numeric"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a new sorted collection containing all the same elements as are in the *collection* to be sorted. Elements in the new collection are ordered based upon the specified *sort block*. This construct differs from the Database Object Sort Construct in that the Element Sort Construct uses a pre-defined CORE sort block to sort the elements whereas the Database Object Sort Construct sorts the elements based upon an expression entered as a construct parameter.

Collection

Variable containing the collection of elements to be sorted. This collection can contain either elements from a single class or elements from multiple classes.

Sort Block

Sort block definition of a sort block defined in the CORE project. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right. This sort criteria continues to govern the behavior of the sorted collection that results from this construct.

Return

Variable to hold the sorted collection of elements.

COREscript Constructs Variable Manipulation

Element Sort Blocks

	Arguments	Parameters
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable an alphabetically sorted collection containing all sort block definitions in the CORE project. This list contains both single class sort blocks and multi-class sort blocks. Therefore, it is very important that a standard naming convention be used when defining sort blocks in CORE. For example, if the names of all multi-class sort blocks have “by class” appended (e.g., Numeric by class), it is very easy to distinguish single class sort blocks from multi-class sort blocks.

Return

The variable to hold the sorted collection of all sort block definitions.

COREscript Constructs Variable Manipulation

Filter

The screenshot shows a 'Filter' dialog box with a light beige background. It has a title bar and two tabs: 'Arguments' and 'Parameters'. The 'Arguments' tab is active, showing the following fields: 'Collection:' with a dropdown menu set to 'nil'; 'Iteration Variable:' with an empty text field; 'Expression:' with a large text area and a 'Validate' button below it; and 'Return:' with a dropdown menu set to 'nil'. The 'Parameters' tab is also visible but empty.

Description

Assigns to the *return* variable a new collection of the same data type as the *collection* to be filtered (except that if the *collection* is a symbol, then a string is returned). Each object in the *collection* to be sorted is assigned, in turn, to the *iteration variable*, and, if the specified *expression* then evaluates to a Boolean *true*, the object is added to the new collection.

Collection

Variable containing the collection of objects to be filtered. Can be of one of the following data types:

- Array
- Bag
- Dictionary
- Ordered Collection
- Set
- Sorted Collection
- String
- Symbol

Iteration Variable

String specifying the name of a variable referenced in the *expression*. This variable is declared within the scope of this construct but will not be accessible after this construct terminates.

If the *collection* to be filtered is a dictionary, then only the values stored in the dictionary will be assigned to the iteration variable, not the keys whereby the values are accessed. If the *collection* is a string or symbol, individual characters are assigned to the iteration variable.

Expression

Indicates the criterion to be used in filtering. An expression consists of operators in the CORE expression language, variables defined using the Edit Variables command under the Properties menu of the Script Editor, constants that can be coded in some data types, and the *iteration variable* described above. This expression must evaluate to a Boolean.

Validate

Validates the syntax of the *expression* to ensure that neither operators nor operands appear in unexpected locations, all operators are recognized, and all variables have been defined. No type or bounds checking can be performed.

COREscript Constructs

Variable Manipulation

Return

Variable to hold the result of this construct. It is of the same data type as the *collection* to be filtered (except that if the *collection* is a symbol, then a string is returned) and contains a subset of the objects therein. If the collections are ordered or sorted, the objects they contain maintain their relative positions.

If the *collection* is a sorted collection, then the same sort criterion will be maintained by the returned collection. If the *collection* is a dictionary, each filtered value will be associated with the same key.

COREscript Constructs Variable Manipulation

Random Number

	Arguments	Parameters
Distribution:	<input type="text" value="nil"/>	<input type="text" value="Normal"/>
Mean:	<input type="text" value="nil"/>	<input type="text" value="0"/>
StandardDeviation:	<input type="text" value="nil"/>	<input type="text" value="0"/>
	<input type="text" value="nil"/>	<input type="text" value="0"/>
Stream:	<input type="text" value="nil"/>	<input type="text" value="1"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a random number drawn from the specified random distribution using the provided parameters. This construct provides access to the 19 random number distributions supported by CORE and COREsim. Access to random numbers is particularly useful when authoring COREsim scripts to randomly select exit paths, induce behavior, etc.

When a distribution is selected from the drop-down list, the labels and fields of this construct transform to represent the specific parameters and data types for the selected distribution. For example, the Normal distribution requires a mean and a standard deviation, both of type float. The ChiSquared distribution requires only a single parameter (N) of type integer. A discussion of the random number distributions can be found in Appendix A of the *COREsim User Guide*.

Distribution

A symbol naming the distribution. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

First Parameter

The first parameter (mean, N, lower bound, ...) required for the specified distribution. The data type is dependent upon the distribution specified. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Second Parameter

If required, the second parameter (standard deviation, beta, ...) for the specified distribution. The data type is dependent upon the distribution specified. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Third Parameter

If required, the third parameter for the specified distribution. The data type is dependent upon the distribution specified. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Stream

An integer indicating which of the 99 available random number streams to supply the seed value for the specified distribution. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Return

Variable to hold the result of this construct, which is a number.

COREscript Constructs

Variable Manipulation

Report Section

	Arguments	Parameters
Name:	<input type="text" value="nil"/>	<input type="text"/>
Number:	<input type="text" value="nil"/>	<input type="text"/>
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a new object of the report section data type. One possible use of this construct is as follows:

This construct is executed multiple times at the beginning of a report script to create different report sections, and each resultant object is added to a collection. A Multiple Selection Prompt is then opened on the collection, allowing the user to choose a subset of the report sections. An iterate construct iterates over the selected report sections and builds a dictionary from them using a simple data type such as a symbol for keys. The script language statements corresponding to each section of the report can be placed in “if-then” constructs, using the presence of the associate key in the dictionary as the condition for execution.

Name

A string naming the new report section. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Number

A hierarchical number according to which report sections can be sorted. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Return

Variable to hold the result of this construct, which is a report section.

COREscript Constructs

Variable Manipulation

Report Setting

	Arguments	Parameters
Setting:		Prepared By Name
Return:	nil	

Description

Assigns to the *return* variable the value of the selected *setting* property from the report settings dialog (e.g., Prepared By Name).

Setting

Name of the property which value is to be returned. It is one of the following strings: "Prepared By Address," "Prepared By Name," "Prepared For Address," or "Prepared For Name."

Return

Variable to hold the result of this construct.

Note: Not available to Simulation scripts.

COREscript Constructs

Variable Manipulation

Sort

	Arguments	Parameters
Collection:	<input type="text" value="nil"/>	
Ascending:	<input type="text" value="nil"/>	<input checked="" type="radio"/> True <input type="radio"/> False
Return:	<input type="text" value="nil"/>	

Description

Assigns to the *return* variable a new, sorted ordered collection containing all the same objects as are in the *collection* to be sorted. Note that the original collection is not modified.

Collection

Variable containing a collection of objects to be sorted. Can be of one of the following data types:

- Array
- Bag
- Dictionary
- Ordered Collection
- Set
- Sorted Collection
- String
- Symbol

If the collection is a dictionary, the objects in the returned collection are the values stored in the dictionary, not the keys whereby the values are accessed. If the collection is a string or symbol, this construct returns a collection of its characters in a new order.

Ascending

Boolean object indicating whether the collection should be sorted in ascending or descending order. If the argument value is *false*, this construct returns the objects in the *collection* in descending order. Can be specified either by a variable from the drop-down on the left or a manual selection from the drop-down on the right.

Return

Variable to hold the result of this construct, which is an ordered collection.

COREscript Constructs Variable Manipulation

Table Definitions

	Arguments	Parameters
Return:	<input type="text" value="nil"/>	

Description


Assigns to the *return* variable an alphabetically sorted collection containing all table definitions in the CORE project. This collection can be used in conjunction with the Table Output construct to quickly include a table in a report.

Return

The variable to hold the sorted collection of all table definitions.

COREscript Constructs Variable Manipulation

Variable Assignment

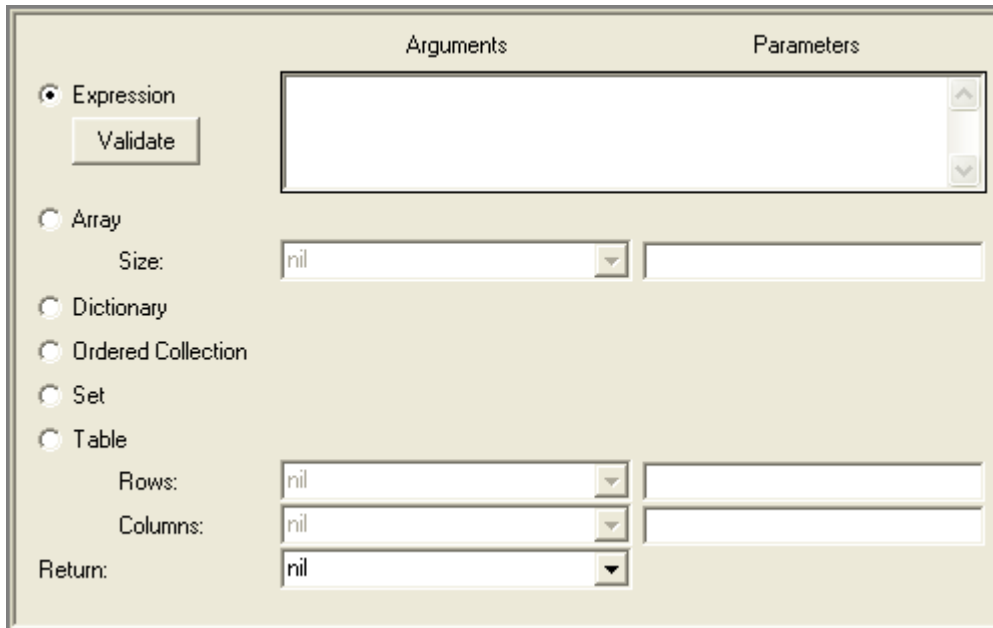

The dialog box is titled "Variable Assignment" and is divided into two main sections: "Arguments" and "Parameters".

Arguments:

- ☒ Expression: A large text area for entering an expression, with a "Validate" button below it.
- ☐ Array: A "Size:" label followed by a dropdown menu showing "nil" and an empty text field.
- ☐ Dictionary
- ☐ Ordered Collection
- ☐ Set
- ☐ Table: "Rows:" and "Columns:" labels, each followed by a dropdown menu showing "nil" and an empty text field.
- Return:** A dropdown menu showing "nil".

Parameters:

Two empty text fields for parameters.

Description

Assigns an object to the *return* variable. The object assigned can be a new and empty collection of one of the available data types or it can be the result of a CORE *expression*.

Expression

An expression consisting of operators in the CORE expression language, variables defined using the Edit Variables command under the Properties menu of the Script Editor, and constants that can be coded in some data types.

Validate

Validates the syntax of the *expression* to ensure that neither operators nor operands appear in unexpected locations, all operators are recognized, and all variables have been defined. No type or bounds checking can be performed.

Data Type

This construct can create new objects of the following types:

- Array
- Dictionary
- Ordered Collection
- Set
- Table

Arrays and tables have fixed dimensions that are also defined by this construct.

Size

The number of indices allocated to the returned array if the Array *data type* is selected. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Rows

The number of rows allocated in the returned table if the Table *data type* is selected. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

COREscript Constructs

Variable Manipulation

Columns

The number of columns allocated in the returned table if the Table *data type* is selected. Can be specified either by a variable from the drop-down on the left or manual entry in the field on the right.

Return

Variable to hold the result of this construct.

CONSTRUCT INDEX

Add Element To Folder	27	Include Script	7
At End.....	71	Include Style Sheet.....	65
Attribute Definition Property	105	Iterate Construct	8
Available Diagrams Query	129	Lock Object.....	29
Beep	130	Message Prompt.....	95
Block Construct	1	Move Element To Folder	30
Breakpoint	131	Multiple Selection Prompt	96
Cancel Report	132	Named Element Query	20
Change Indicator	133	New Element.....	31
Children Query	13	New Folder.....	32
Class Attributes	106	New Relationship	33
Class Parameters.....	107	Next.....	73
Class Property.....	108	Open File Dialog	46
Class Query.....	109	Open Input File	47
Class Relations	110	Open Output File.....	48
Class Target Classes	111	Open Temporary Output File	49
Close File	45	Open Transcript	137
Color Query	134	Parameter Definition Property	118
Comma-Delimited Output.....	53	Parents Query	21
Comment.....	135	Peek.....	74
Composite Selection Prompt	91	Project Explorer Prompt.....	98
Database Classes	112	Project Property	81
Database Object Sort.....	143	Project Query	83
Delete Object	28	Project Registry Query.....	84
Diagnostic Results Query.....	14	Projects	85
Diagram File Output	54	Prompt Separator.....	99
Diagram Output.....	57	Purge Attribute Versions	34
Disabled Code Construct	2	Random Number.....	149
Drop-Down Selection Prompt	92	RDT Output.....	66
Element Attribute Query	15	Relation Attributes.....	119
Element Output	60	Relation Property	120
Element Selection Prompt.....	93	Relation Query	121
Element Sort	145	Relations	122
Element Sort Blocks.....	146	Relationship Attribute Query	22
Elements Defined Parameters Query	16	Relationships Query.....	23
Elements Parameter Units Query	17	Remove Element From Folder.....	35
Elements Parameter Value Query	18	Remove Project Registry Key	86
Elements Query	19	Rename Element	36
ExpireOutputs	136	Rename Folder	37
Facilities	113	Renumber Element.....	38
Facility Database Classes	114	Repeat Until Construct.....	9
Facility Property	115	Report Section	150
Facility Query	116	Report Setting	151
Facility Schema Classes	117	Report Settings Prompt	100
Filter	147	Resource Level Query	125
Get Position.....	72	Return	10
Hierarchy Iterate Construct	3	Root Folder Query	24
If Then Construct.....	5	Save File Dialog.....	50
If Then Else Construct.....	6	Schema Classes	123
Include External Boilerplate	63	Script Context Query.....	126
Include External Graphic.....	64	Send Mail Message	138

COREscript Constructs

Set Default Input File.....	51	Sort	152
Set Default Output File	52	System Property Query	140
Set Element Attribute	39	Tag Output	68
Set Element Diagnostic Results.....	40	Targets Query	25
Set Element Parameter Units.....	41, 42	Text Output	69
Set Position	75	Unlock Object.....	44
Set Project.....	87	Up To	78
Set Project Registry Value	88	Update Block Construct	11
Set Relationship Attribute.....	43	Value Prompt	102
Set Style	67	Variable Assignment	153
Simulator Property Query.....	127	Variable Output	70
Single Selection Prompt.....	101	While Do Construct.....	12
Size	76	YesOrNo Prompt.....	103
Skip	77		



Vitech Corporation
2270 Kraft Drive, Suite 1600
Blacksburg, Virginia 24060
540.951.3322 FAX: 540.951.8222
Customer Support: support@vitechcorp.com
www.vitechcorp.com